

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[FCI](#)
[86418-001](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




PRODUCT NO	CONDUCTOR POS NO	CONDUCTOR ASSY POS NO	CONTACT PLATING	HOUS'G COLOR
86418-001	4-4	1,2,3,4	5u" Au + high performance lubricant	GRAY
86418-001LF				

LEAD FREE PRODUCT NO.



NOTE:

1. FOR VISUAL, MECHANICAL AND FUNCTIONAL REQUIREMENTS, SEE PRODUCT SPEC. 110-042.
2. HOUSING MAT'L: GLASS REINFORCED 66 NYLON ZYTEL -FR50, UL94V-0.
3. GOLD WIRE MAT'L: PHOS. BRONZE 0.46 DIA. PLATING: SEE TABLE
4. A. STANDARD PACKAGING METHOD(USE TRAY): SEE GES-14-351.
B. NON-STANDARD PACKAGING METHOD(USE TUBE): SEE GES-14-358.
THE PART NO. SHOULD BE SUFFIXED WITH "T" OR "TLF"
E.G.86418-001T OR 86418-001TLF
5. MATING PLUG: PLUG NEED TO CONFORM TO THE FCC TYPE 616.
6. IF LF P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD
8. IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION

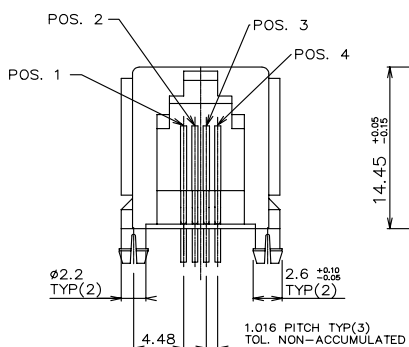

mat'l. code	surface	tolerance	projection	product family
	ISD1302	ISD1101 ISD406		MOD JACK
l'techn n'dr date	tolerances unless otherwise specified	angle	mm	LOW PROFILE
D 160046 02/02/96	0.XX±0.3	0°±2'	scale 2.0	616PCB MOD JACK
E T03-0443 10/06/03	0.XX±0.15			
F N05-0018 01/25/05	0.XXX±0.05			
G BX-N-011019 03/25/12				
engr TONY CHIEN 11/18/91				
chr TONY CHIEN 11/18/91				
appd JENN TSAO 11/18/91				
sheet revision				
index sheet 1				