

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Sanken](#)  
[FML-14S](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

1. Scope

The present specifications shall apply to Sanken silicon diode, FML-14S.

2. Outline

Type	Silicon Rectifier Diode	
Structure	Resin Molded	Flammability : UL94V-0 (Equivalent)
Applications	High Frequency Rectification	

3. Absolute maximum ratings

No.	Item	Symbol	Unit	Rating	Conditions
1	Transient Peak Reverse Voltage	$V_{RSM}$	V	400	
2	Peak Reverse Voltage	$V_{RM}$	V	400	
3	Average Forward Current	$I_{F(AV)}$	A	5	Tc=122°C Sinewave
4	Peak Surge Forward Current	$I_{FSM}$	A	40	10msec. Half sinewave, one shot
5	I <sup>2</sup> t Limiting Value	I <sup>2</sup> t	A <sup>2</sup> s	8	1msec≤t≤10msec
6	Junction Temperature	T <sub>j</sub>	°C	-40~+150	
7	Storage Temperature	T <sub>stg</sub>	°C	-40~+150	


No.1,2,4&5 show ratings per one chip.

4. Electrical characteristics (Ta=25°C, unless otherwise specified)


No.	Item	Symbol	Unit	Value	Conditions
1	Forward Voltage Drop	$V_F$	V	1.3 max.	$I_F=2.5A$
2	Reverse Leakage Current	$I_R$	μA	50 max.	$V_R=V_{RM}$
3	Reverse Leakage Current Under High Temperature	$H \cdot I_R$	μA	100 max.	$V_R=V_{RM}$ , Ta=100°C
4	Reverse Recovery Time	trr1	ns	50 max.	$I_F=I_{RP}=100mA$ 90% Recovery point, Ta=25°C
		trr2	ns	35 max.	$I_F=100mA, I_{RP}=200mA$ 75% Recovery point, Ta=25°C
5	Thermal Resistance	$R_{th(j-c)}$	°C /W	4.0 max.	Between Junction and case

No.1,2,3&4 show characteristics per one chip.

5. Characteristics

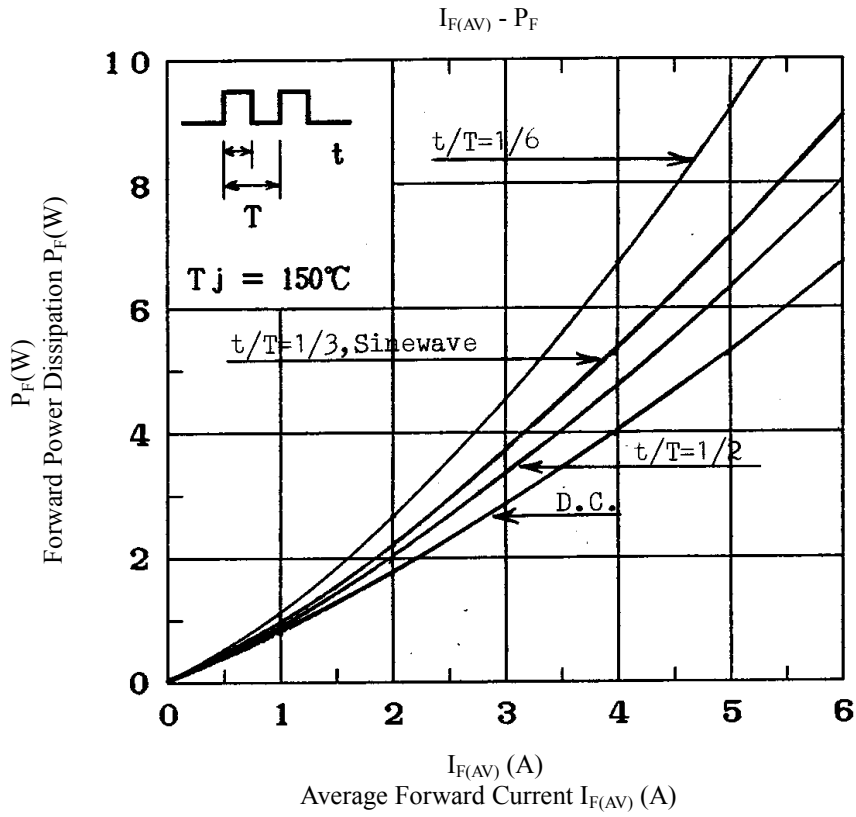

6. Derating

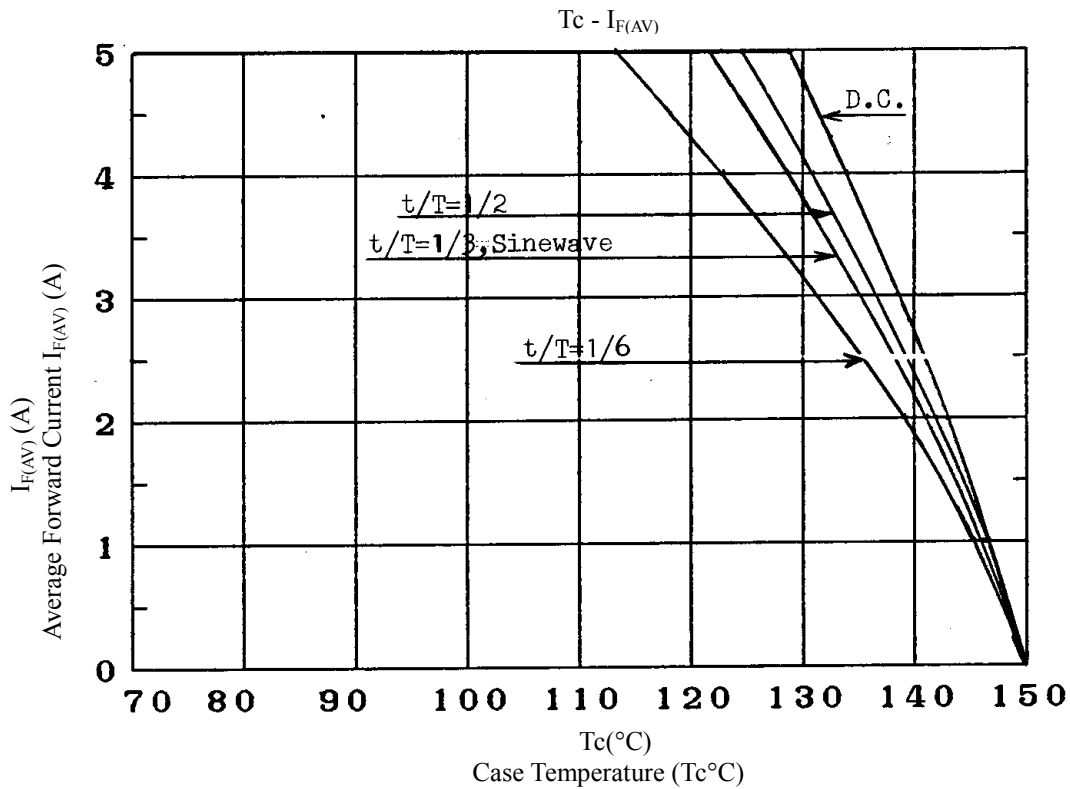


SANKEN ELECTRIC CO., LTD.

FML-14S

7. Package information

7-1 Package type, physical dimensions and material

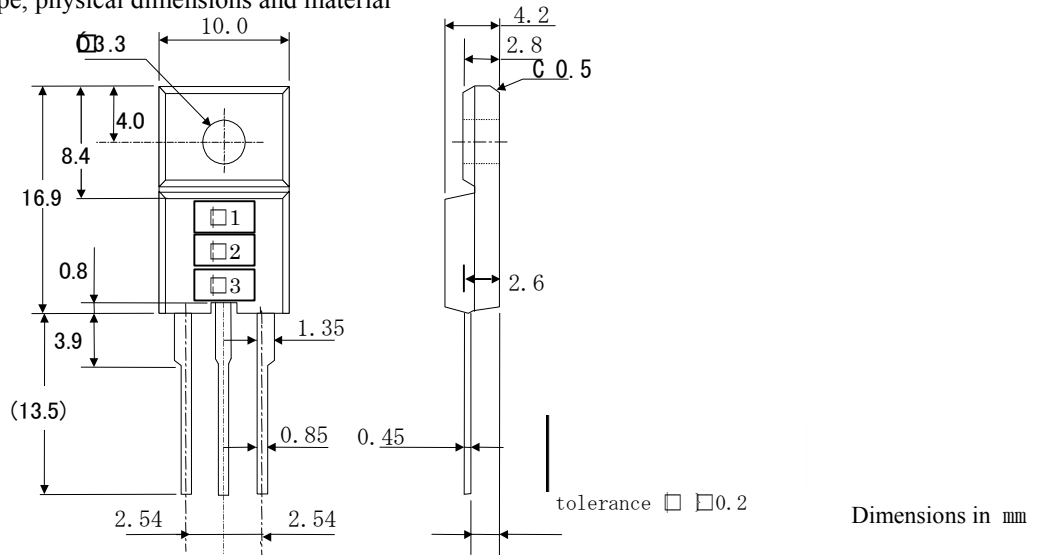

7-2 Appearance

The body shall be clean and shall not bear any stain, rust or flaw.

7-3 Marking

Type Name	Marking		
	*1 Type Name	*2 Polarity	*3 Lot number
FML-14S	FML14S		1st letter: Last digit of year 2nd letter: Month From 1 to 9 for Jan. to Sep., O for Oct., N for Nov., D for Dec. 3rd & 4th letter: Day ex. 4806 (Aug. 6, 2004)