

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Bel Fuse Inc.](#)
[S560-6600-JF-F](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



Octane & G24 SHDSL
Conexant

S560-6600-JF

- Designed to meet the requirements of UL1950 and EN60950 basic insulation with 250 VAC working voltage
- UL file number E150991, BABT certificate number NC0011825, CB certificate number 14210
- Minimum interwinding breakdown voltage of 1500 Vrms for 1 minute between line and IC
- Minimum interwinding breakdown voltage of 600 Vrms for 1 minute between pins 1 and 2
- Operating and storage temperature range: -40° to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: shock, vibration, temperature cycling, temperature - humidity - bias
- All specifications must be met for any DC unbalance current up to 50mA max in the line side


ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ±2%	Inductance ¹ µH ±7%	Leakage Inductance ² µH	DCR Ω max		Interwinding Capacitance ³ pF max	Longitudinal Balance ⁴ dB max	Harmonic Distortion ⁴ dB max
	Line : IC	(1 - 4)	(1 - 4)	IC Side	Line Side	Line : IC	20kHz - 500kHz	4Vrms 5kHz
S560-6600-JF	0.70 : 1	3.18	15	7.8	24	200	52	-85

All measurements are made with pin 2 connected to pin 3 and pin 5 connected to pin 7 except for breakdown voltage between pin 1 and 2.

1. Inductance measured at 10 kHz, 0.1 Vac
2. Leakage inductance measured at 100 kHz, 0.1 Vac
3. Interwinding capacitance measured at 10 kHz, 1.0 Vac
4. Measured with line impedance of 135 Ω and IC impedance of 275.5 Ω

SCHEMATIC

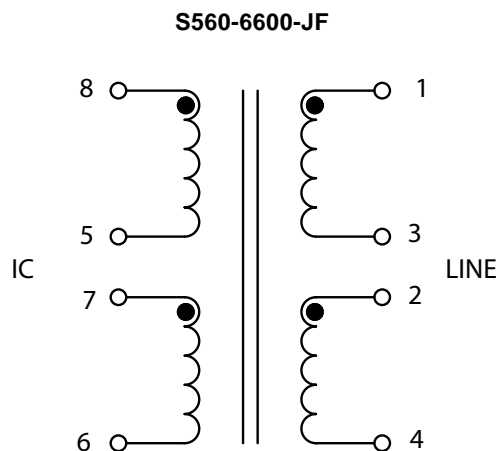




Octane & G24 SHDSL
Conexant



S560-6600-JF

MECHANICAL

S560-6600-JF

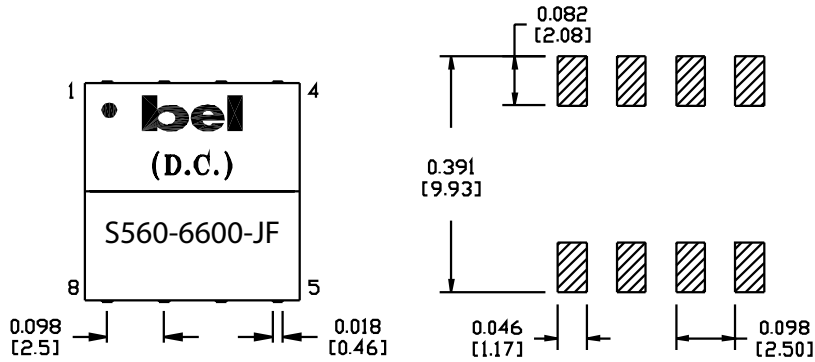

SUGGESTED PAD LAYOUT

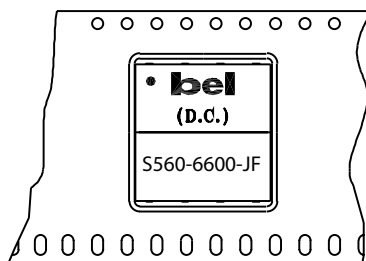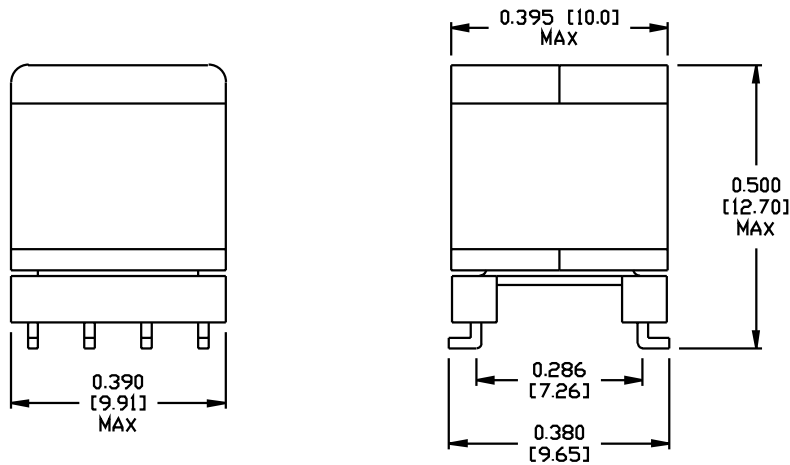

➔ USER FEED DIRECTION

Tape and Reel Packaging

24 mm wide by 20 mm pitch; 13 inch OD, 4 inch ID
 200 components per reel, maximum
 Meets ANSI/EIA 481-2 Carrier Tape Standards

©2004 Bel Fuse Inc. Specifications subject to change without notice. 12.04

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
 www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F / 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
 www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
 www.belfuse.com