



## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AT-C-26-4/4/W-12/R](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

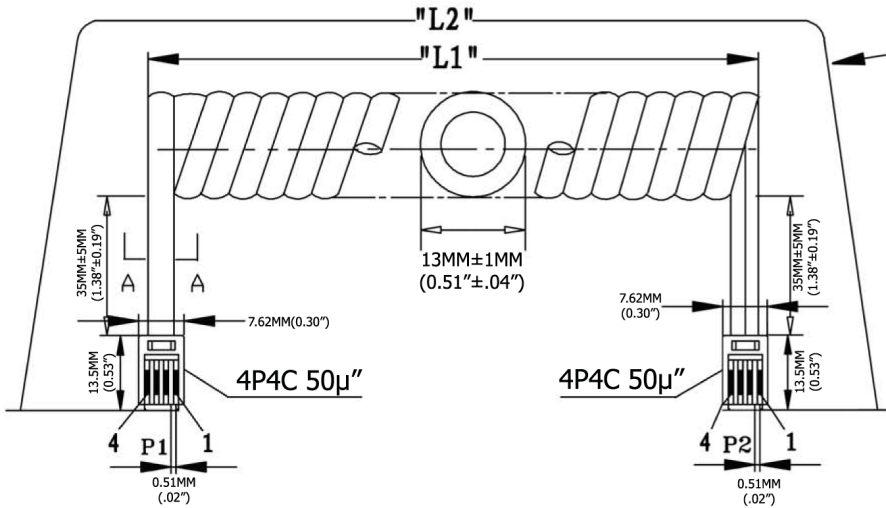

Extended length is with 500g of force

**Materials:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag



**TERMINATION:**

P1	P2	COLOR
1	1	BLACK
2	2	RED
3	3	GREEN
4	4	YELLOW

Extended Length ("L2")	Typical Retracted Length ("L1")
144.0 Inches - 165.6 Inches	32.0 Inches
3,657.6MM-4,206.24MM	812.8MM

SEC:A-A



ITEM NO  
**AT-C-26-4/4/W-12/R**  
 TITLE NON-UL 26AWG (0.16/7)\*4C, O.D.: 2.4\*4.8MM  
 Reverse Plug, 50µ" of contact plating, WHITE

**ASSMANN**  
 Electronics, Inc.  
 1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 © Copyright 2009 by Assmann Electronic Components  
 All International Rights Reserved