



## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AT-C-26-6/6/S-25](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

1 2 3 4 5 6 7

A

B

C

D

E

F

G

H

A

B

C


D

E


F

G

H

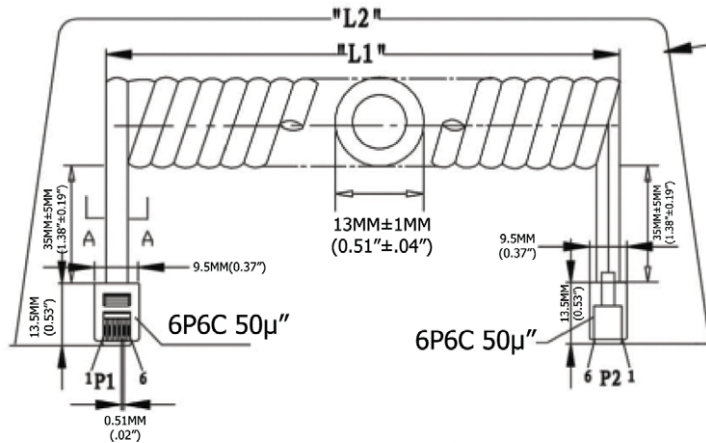

Extended length is with 500g of force



SBC: A=A

P1	P2
1 WHITE	6
2 BLACK	5
3 RED	4
4 GREEN	3
5 YELLOW	2
6 BLUE	1

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	134.0 Inches
7,620.0MM-8,763.0MM	3,403.6MM

**Material:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Scale	1:1					Name	Item No. <b>AT-C-26-6/6/S-25</b>
TOLERANCE					Drawn	11.02.11	
X.X	±0.40				Approved		Drawing No.
X.XX	±0.25						
X.XXX	±0.15						Sheet
Angle	±3°						
Modification		Date	Name				



1 2 3 4 5 6 7