



## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AT-C-26-8/8/B-12/R](#)

For any questions, you can email us directly:


[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

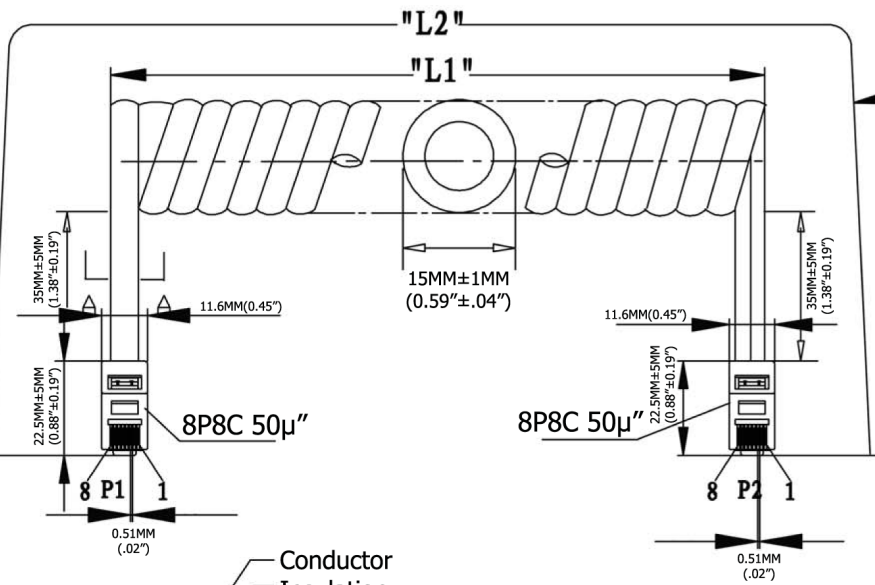

Extended length is with 500g of force

**Materials:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

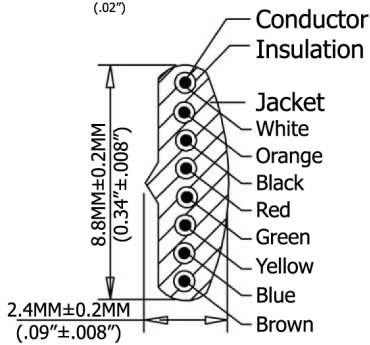

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

Extended Length ("L2")	Typical Retracted Length ("L1")
144.0 Inches - 165.6 Inches	65.0 Inches
3,657.6MM-4,206.24MM	1,651.0MM



ITEM NO  
**AT-C-26-8/8/B-12/R**  
 TITLE NON-UL 26AWG (0.16/7)\*8C, O.D.: 2.4\*8.8MM  
 Reverse Plug, 50µ" of contact plating, BLACK

**ASSMANN**  
 Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 © Copyright 2009 by Assmann Electronic Components  
 All International Rights Reserved