Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Harting
09695120364

For any questions, you can email us directly:
sales@integrated-circuit.com

Cable assemblies

Hybrid cable assembly

Han

Identification	Part number	Drawing	Dimensions in mm
Hybrid cable, double ended, 4 x 2 x AWG 26/7 + 3 x 2.5 mm²		double ended	
Length: 1 m		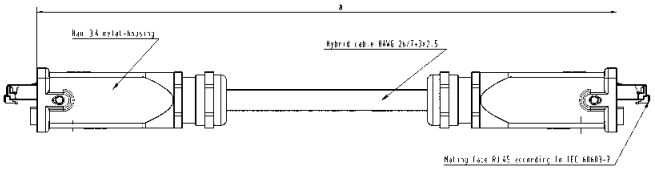	
AC version	33 57 211 0010 001		
DC version	33 57 211 0010 002		
Length: 5 m		a = length	
AC version	33 57 211 0050 001		
DC version	33 57 211 0050 002		
Length: 10 m			
AC version	33 57 211 0100 001		
DC version	33 57 211 0100 002		
Length: 20 m			
AC version	33 57 211 0200 001		
DC version	33 57 211 0200 002		
Hybrid cable, single ended, 4 x 2 x AWG 26/7 + 3 x 2.5 mm²			
Length: 1 m			
AC version	33 57 111 0010 002	Protection level: IP65 / IP67	
DC version	33 57 111 0010 001		
Length: 5 m		Data part: Transmission properties in accordance with ISO/IEC 11 801:2002: Class D	
AC version	33 57 111 0050 002		
DC version	33 57 111 0050 001		
Length: 10 m		single ended	
AC version	33 57 111 0100 002		
DC version	33 57 111 0100 001		
Length: 20 m			
AC version	33 57 111 0200 002		
DC version	33 57 111 0200 001	a = length	
Hybrid outdoor cable			
Length: 10 m	33 57 851 0100 001		PVC jacket
Length: 20 m	33 57 851 0200 001		4 x 2 x AWG 26/7 + 3 x 2.5 mm²
Length: 500 m	33 57 851 5000 001		Outer diameter: 12 mm
			Min. bending radius: single: 5 x OD; repeated: 10 x OD