

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[09731426903](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

DIN 41 612 · complementary type M invers



Number of contacts

78+2, 60+4, 42+6, 24+8

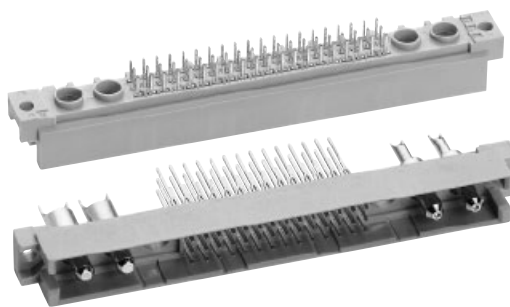

Male connectors

DIN Signal
up to 2 A

| Identification | Number of contacts | Contact arrangement | Part No. Performance levels according to IEC 60603-2. Explanation chapter 00 | | |
|---|--------------------|---------------------|--|----------------|--------------------------------|
| | | | 3 | 2 | 1 |
| Male connector with solder pins 2.5 mm | 78 + 2 | | Performance level 3 on request | 09 73 178 6902 | Performance level 1 on request |
| | 60 + 4 | | | 09 73 160 6902 | |
| | 42 + 6 | | | 09 73 142 6902 | |
| | 24 + 8 | | | 09 73 124 6902 | |
| Male connector with solder pins 4.0 mm | 78 + 2 | | | 09 73 178 6903 | |
| | 60 + 4 | | | 09 73 160 6903 | |
| | 42 + 6 | | | 09 73 142 6903 | |
| | 24 + 8 | | | 09 73 124 6903 | |
| Male connector with solder pins 6.0 mm | 78 + 2 | | | 09 73 178 6991 | |
| | 60 + 4 | | | 09 73 160 6991 | |
| | 42 + 6 | | | 09 73 142 6991 | |
| | 24 + 8 | | | 09 73 124 6991 | |
| Male connector with wrap posts 13 mm | 78 + 2 | | | 09 73 178 6907 | |
| | 60 + 4 | | | 09 73 160 6907 | |
| | 42 + 6 | | | 09 73 142 6907 | |
| | 24 + 8 | | | 09 73 124 6907 | |
| Male connector with press-in pins 13 mm (5.0 mm on request) | 78 + 2 | | 09 73 178 6985 ^{w)} 09 73 178 6974● | | |
| | 60 + 4 | | 09 73 160 6985 ^{w)} 09 73 160 6974● | | |
| | 42 + 6 | | 09 73 142 6985 ^{w)} 09 73 142 6974● | | |
| | 24 + 8 | | 09 73 124 6985 ^{w)} | | |