

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[11051053011](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# Han-Yellok® Monoblock 30


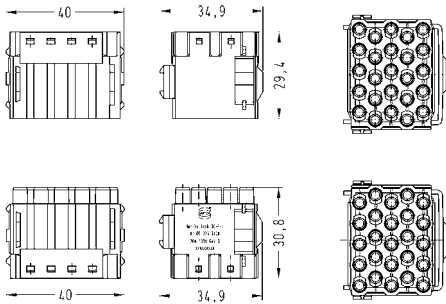

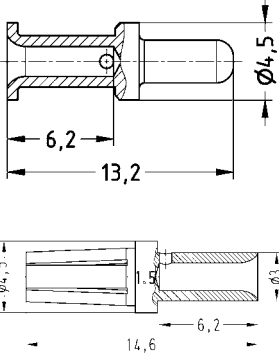


Size 30



Number of contacts

# 25

500 V  
16 A

Identification	Wire cross section (mm²)	Part number		Drawing Dimensions in mm																		
		male	female																			
<p>Han-Yellok®, Crimp terminal</p>  <p>Please order crimp contacts separately. ATTENTION! It is not possible to use 2 monoblocks 30 in the Han-Yellok® 60 series!</p>		11 05 325 3001	11 05 325 3101																			
<p>Han-Yellok®, Crimp contact, gold plated contacts, contact resistance ≤2 mOhm</p> 	0.14 – 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228																			
<p>Han-Yellok®, Crimp contact, silver plated contacts, contact resistance ≤2 mOhm</p> 	0.14 – 0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208	 <table border="1" data-bbox="1038 1498 1495 1762"> <thead> <tr> <th>Wire gauge</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1 mm²</td> <td>AWG 18</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> </tr> <tr> <td>3 mm²</td> <td>AWG 12</td> </tr> <tr> <td>4 mm²</td> <td>AWG 12</td> </tr> </tbody> </table> <p>Removal tool 09 99 000 0319 see chapter 90</p>	Wire gauge	Stripping length	0.14-0.37 mm²	AWG 26-22	0.5 mm²	AWG 20	0.75 mm²	AWG 18	1 mm²	AWG 18	1.5 mm²	AWG 16	2.5 mm²	AWG 14	3 mm²	AWG 12	4 mm²	AWG 12
Wire gauge	Stripping length																					
0.14-0.37 mm²	AWG 26-22																					
0.5 mm²	AWG 20																					
0.75 mm²	AWG 18																					
1 mm²	AWG 18																					
1.5 mm²	AWG 16																					
2.5 mm²	AWG 14																					
3 mm²	AWG 12																					
4 mm²	AWG 12																					

Han-Yellok