

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[17510722802](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

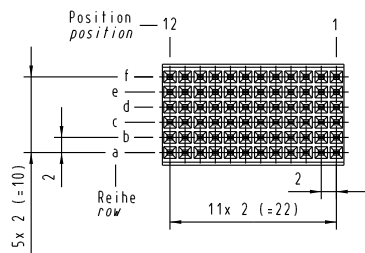


5:1

kinked pins at both ends
of the connector

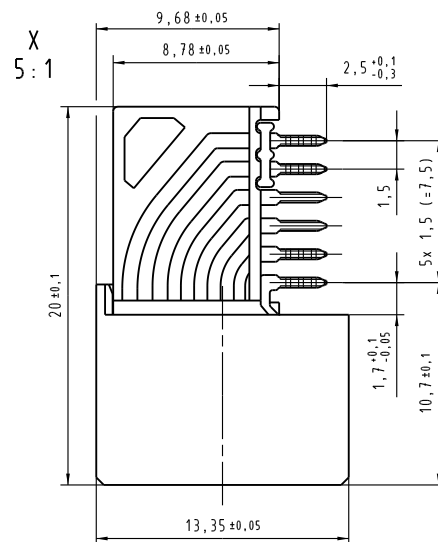

Bohrlochdurchmesser: $\phi 0,8 \pm 0,02$ mm
Lochdurchmesser (mit Oberfläche): $\phi 0,7 \pm 0,05$ mm
drill hole dia.: $\phi 0,8 \pm 0,02$ mm
through hole dia. (after plating): $\phi 0,7 \pm 0,05$ mm

**Lochbild
board drillings**

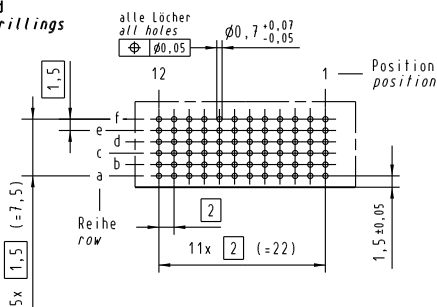

17 51 072 4802	-	min. 0,76µm(30µin)Au über/over min. 1,27µm(50µin)Ni
17 51 072 2802	2	Au über/over Ni
17 51 072 1802	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktüberfläche contact plating

All Dimensions in mm Original Size DIN A 3			Techn. Character.		Nicht tolerierte Maß free size tolerances	
Mod.	Dat.	Name	But.	Name	Maßstab/Scale	Blatt/ page
32623	06.04.05	HI.	Detail: 31.03.04	Bus.	2:1 (5:1)	har-bus HM Federleiste 6-reihig 72 pol., PIHR (Hochtemperatur) har-bus HM female connector 6-row 72 pol., PIHR (high temperature)
31809			Insp. 31.03.04	Ko		
			Stand.			
HARTING Electronics GmbH & Co. KG			0-32339 ESPELKAMP		TB 17 51 072 x802	Sub.