

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)  
[17700004001](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

## DIN Power overview

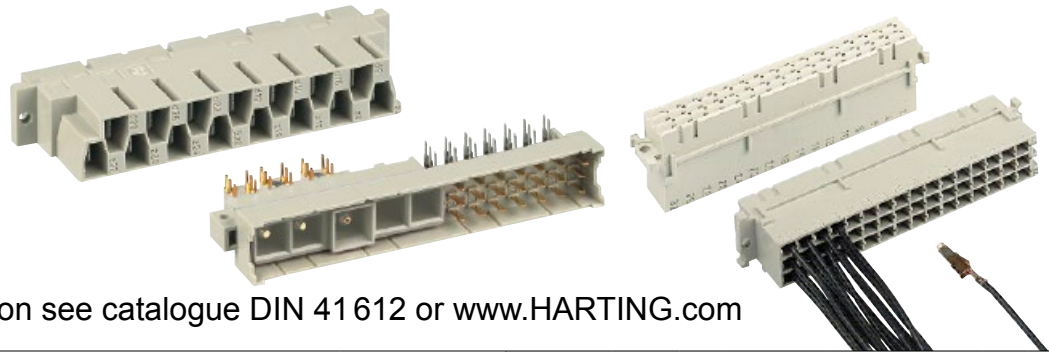

For detailed information see catalogue DIN 41 612 or [www.HARTING.com](http://www.HARTING.com)

Type	Maximum number of contacts			Termination								
				Solder	Reflow Soldering (SMC)	Solder lug	Press-in	Crimp	Wire wrap	Faston	Cage clamp	
D	32		male	3.0 mm	X							
			female	2.9 mm 4.5 mm		X		X	20.0 mm			
E	48		male	3.0 mm	X							
			female	2.9 mm 4.5 mm		X	4.5 mm 11.5 mm	X	20.0 mm			
			Interface connector I	4.0 mm								
F	48		male	3.0 mm	X							
			female	3.7 mm 4.5 mm		X		X	22.0 mm			
F Low profile	48		female	3.7 mm 4.5 mm			4.5 mm 13.0 mm					
			Interface connector I	3.5 mm				X	22.0 mm			
F 9	9		male					X				
			female					X				
FM	45		male	3.0 mm				X				
			female	4.5 mm				X	22.0 mm			
2 F	24		female					X				
			Interface connector I					X				