

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[33571110010001](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Alle Rechte vorbehalten. All rights reserved

Mating face RJ45 according to IEC 60603-7

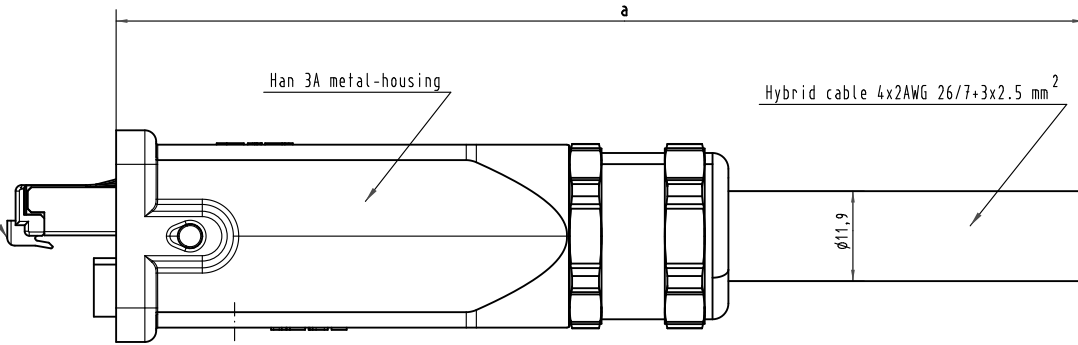

Loading-Plan (Data)

- Shield
- 1 White/green
 - 2 Green
 - 3 White/orange
 - 4 Blue
 - 5 White/blue
 - 6 Orange
 - 7 White/brown
 - 8 Brown


Loading-Plan DC version

- 1 black
- 2 blue
- PE green/yellow PE

-Protection level: IP67
-Temperature range: -20°C ...+70°C

Data Part
-Transmission properties in accordance with ISO/IEC 11801:2002: Class D.

????????R??

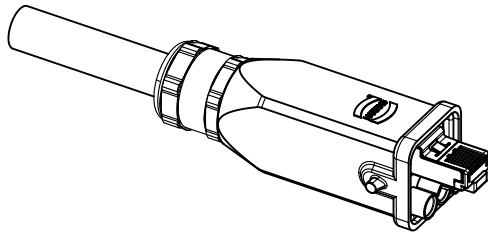

7	Hybrid cable 4x2AWG26/7+3x2.5 mm ²	DC	33 57 111 080 0001	80 m
6	Hybrid cable 4x2AWG26/7+3x2.5 mm ²	DC	33 57 111 060 0002	60 m
5	Hybrid cable 4x2AWG26/7+3x2.5 mm ²	DC	33 57 111 040 0001	40 m
4	Hybrid cable 4x2AWG26/7+3x2.5 mm ²	DC	33 57 111 020 0001	20 m
3	Hybrid cable 4x2AWG26/7+3x2.5 mm ²	DC	33 57 111 010 0001	10 m
2	Hybrid cable 4x2AWG26/7+3x2.5 mm ²	DC	33 57 111 005 0001	5 m
1	Hybrid cable 4x2AWG26/7+3x2.5 mm ²	DC	33 57 111 001 0001	1 m

Cont. No.	Type of cable	Part-No.	Dim. a
-----------	---------------	----------	--------

All Dimensions in mm Original Size DIN A 3		Nicht tel. Maße/ Free size tel.		Ref. NB	
		Oberflächenschutz/ Surface qual.		Mat.	
		Oberflächenschutz/ Coating			
		V:	cm ¹	A:	mm ²
		Detail.	20.05.08	MS	2:1
		Insp.	20.05.08	RA	
DRS648A 03.12.09 MS		Stand.			
35035 10.11.08 MS		HARTING Electronics GmbH & Co. KG		Hybrid cable assembly, 4x2AWG26/7+3x2.5 mm ² HAN3A, DC	
34553		D-32339 Espelkamp		TB 33 57 111 xxx 0001	
Mod.	Dot.	Name	Sub.		