

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[33571110010002](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

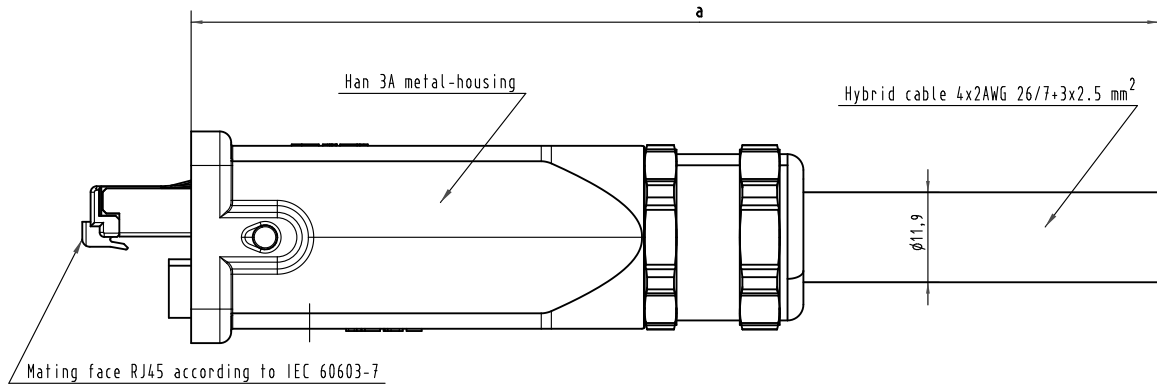

Loading-Plan
(Data)

Shield

- 1 White/green
- 2 Green
- 3 White/orange
- 4 Blue
- 5 White/blue
- 6 Orange
- 7 White/brown
- 8 Brown


Loading-Plan
(Power)

- L1 black
N blue
PE green/yellow

-Protection level: IP67
-Temperature range: -20°C ...+70°C

-Data transmission properties in accordance
with ISO/IEC 11801:2002 ? ? ? R ? ?

Cont. No.	Type of cable	Part-No.	Dim. a
4	Hybrid cable 4x2AWG26/7+3x2.5 mm² AC	33 57 111 020 0002	20 m
3	Hybrid cable 4x2AWG26/7+3x2.5 mm² AC	33 57 111 010 0002	10 m
2	Hybrid cable 4x2AWG26/7+3x2.5 mm² AC	33 57 111 005 0002	5 m
1	Hybrid cable 4x2AWG26/7+3x2.5 mm² AC	33 57 111 001 0002	1 m

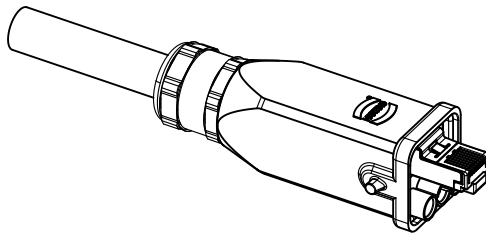

		All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht Tolerierte Maß/Free size tolerances	

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP



Blatt/ page