

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[33572110015004](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Han® 3 A



Identification

Part No.


Drawing

Dimensions in mm


Hybrid fibre optic cable,
single mode, double ended
2 x FO + 3 x 2.5 mm², 2 x Han® 3 A

Length: a = 1 m	AC version DC version	33 57 211 0015 003 33 57 211 0015 004
a = 5 m	AC version DC version	33 57 211 0055 003 33 57 211 0055 004
a = 10 m	AC version DC version	33 57 211 0105 003 33 57 211 0105 004
a = 20 m	AC version DC version	33 57 211 0205 003 33 57 211 0205 004
a = 40 m	AC version DC version	33 57 211 0405 003 33 57 211 0405 004
a = 50 m	AC version DC version	33 57 211 0505 003 33 57 211 0505 004
a = 100 m	AC version DC version	33 57 211 1005 003 33 57 211 1005 004

double ended

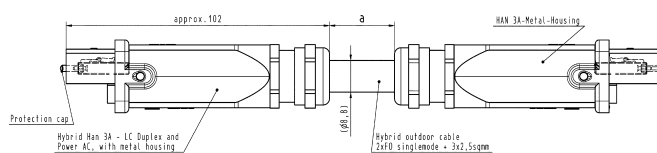

a = length




Protection level: IP 65 / IP 67

Hybrid fibre optic cable,
single mode, single ended
2 x FO + 3 x 2.5 mm², 1 x Han® 3 A

Length: a = 1 m	AC version DC version	33 57 111 0015 003 33 57 111 0015 004
a = 5 m	AC version DC version	33 57 111 0055 003 33 57 111 0055 004
a = 10 m	AC version DC version	33 57 111 0105 003 33 57 111 0105 004
a = 20 m	AC version DC version	33 57 111 0205 003 33 57 111 0205 004
a = 40 m	AC version DC version	33 57 111 0405 003 33 57 111 0405 004
a = 50 m	AC version DC version	33 57 111 0505 003 33 57 111 0505 004
a = 100 m	AC version DC version	33 57 111 1005 003 33 57 111 1005 004

single ended

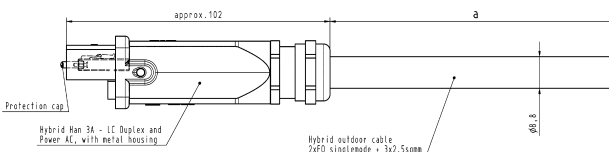

a = length

Hybrid fibre optic cable,
single mode

Length: 10 m	33 57 851 0100 003
Length: 20 m	33 57 851 0200 003
Length: 500 m	33 57 851 5000 003



PVC jacket
 2 x 9/125 + 3 x 2.5 mm²
 Outer diameter: 8.8 mm
 Min. bending radius:
 Installation: 9 cm
 Operating: 18 cm