

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[60900056009](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


5

4

3

2

1

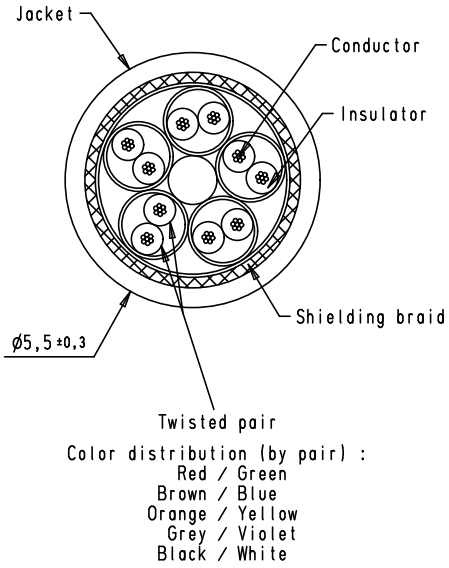

Conductor	Stranded tinned copper wire 7 x $\phi$ 0,1 mm
Insulator	Foamed polypropylene $\phi$ 0,74 mm
Shield	Tinned copper braid 65% coverage
Jacket	Thermoplastic copolymer (FRNC) BK
Max operating voltage	100 V
Max conductor resistance (20°C)	350 m $\Omega$ /m
Min insulator resistance (20°C)	10 M $\Omega$ /m
Capacitance (1kHz)	45 pF/m
Characteristic impedance (100 MHz)	(95 $\pm$ 5) $\Omega$
Max time delay skew (pair to pair)	50 ps/m
Temperature rating	-25°C to +80°C
UL style 21283	

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4	Cable with 5 shielded twisted pairs, halogen free, 100 m length per reel	Maßstab/ Scale 8:1	
			Detail.	27/03/09				PK
			Insp.					
			Stand.					
EC00334	21/04/09	PK	HARTING EURL F-95972 Paris				<b>TB 60 90 005 6009</b>	Blatt/ Page 1 / 1
EC00322	27/03/09	PK						
Mod.	Det.	Name				Sub.		