

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[A-TB381-OP02](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

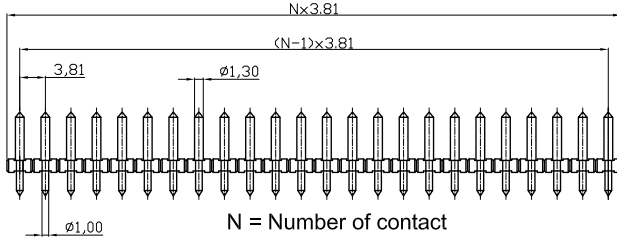

Material
 Solid PIN: Brass(CuZn)
 Surface of solder tail: Matte Tin plated. Ⓣ
 Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus
 Voltage rating: 300V
 Current rating: 10A
 Withstanding Voltage: 1.6KV
 Operating temperature: -40°C to +115°C
 Soldering temperature: 250°C±10°C/5 Sec
 Safety Approval:

P.C.B. LAYOUT



RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	29.07.2009	Dean
X.	±0.50					Approved	23.07.2014	Amy
X.X	±0.30							
X.XX	±0.10							
DIM	TOL	②	Update the plating to Matte Tin	23.07.2014	Amy	 Drawing-No. ASS 3597 CO rev02		
X.°	±1°	①	Drawn	29.07.2009	Dean			
Angle	TOL	Id.	Modification	Date	Name	Replace		Sheet

1

2

3

4

5

6

7