

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ASSMANN WSW Components](#)

[AK377-5-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

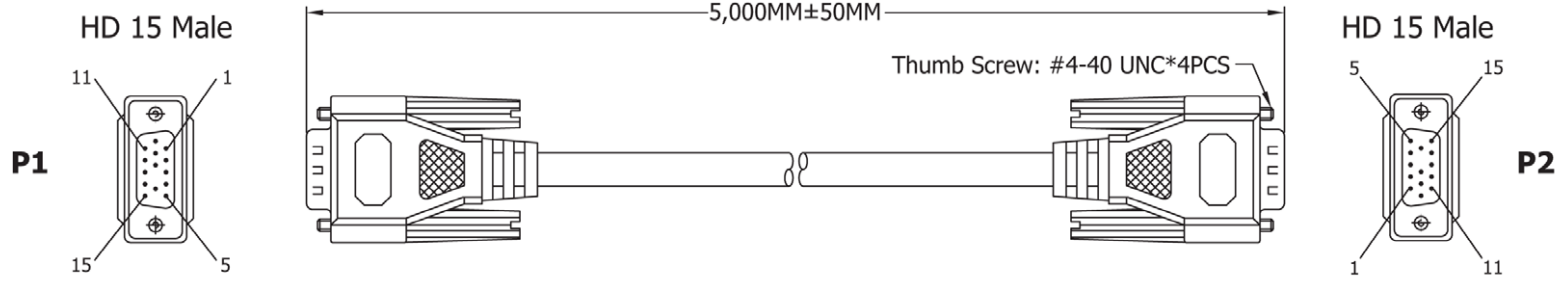

Material:

1. CABLE: NON-UL 28AWG(7/0.127)TC*14C INS:PVC+DRAIN WIRE(26AWG 7/0.16)+AL-FOIL/MYLAR
 PVC JACKET COLOR:BEIGE, OD:6.0±0.2mm
2. CONNECTOR:
 P1&P2:HD15P MALE GOLD FLASH CONTACT,
 NICKEL PLATED SHELL(THE 9TH PIN UNLOAD)
3. HOOD:MOLDED TYPE PVC 45P COLOR:BEIGE.
4. ELECTRICAL TEST:
 <1>100% OPEN SHORT & MIS WIRE TEST.
 <2>CONTACT RESISTANCE 3 Ohms MAX.
 <3>INSULATION RESISTANCE 20M Ohms MIN.
5. PACKING:SEE P-0039 REV.C PACKING DRAWING+EAN CODE
 PACKING TYPE: DB VP4
 (HANKING SIZE MUST BE SMALLER THAN PACKING)

PIN Assignment		
P1		P2
1	WHITE	1
2	GREY	2
3	YELLOW	3
4	PINK	4
5	ORANGE	5
6	RED	6
7	BROWN	7
8	GREEN	8
10	BLUE	10
11	PURPLE	11
12	LIGHT GREEN	12
13	LIGHT BLUE	13
14	BLACK	14
15	WHITE/BLACK	15
Shell	DRAIN	Shell

⊕ = Assmann logo



ITEM NO.	AK377-5
TITLE	VGA Monitor Connection cable - HD D-Sub 15-pin Male <=> Male, 5 Meters

ASSMANN
 Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
 Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
 ©Copyright 2010 by Assmann Electronic Components
 All International Rights Reserved