

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09022646825222](tel:09022646825222)


For any questions, you can email us directly:
sales@integrated-circuit.com

DIN 41 612 · Type B



Number of contacts

64

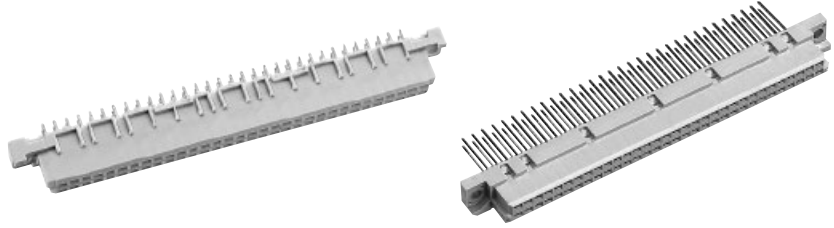

Female connectors

DIN Signal
up to 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60603-2. Explanation chapter 00		
				3	2	1
Female connector with solder pins 2.9 mm SMC	64		Performance level 3 on request	09 02 264 6824 09 02 464 6824 ^{b)} 09 02 764 6824 ^{c)}	09 02 264 2824	
	64			09 02 264 6841 ^{d)}		
Female connector with solder pins 4.5 mm SMC	64			09 02 264 6825 09 02 264 6825 222 ^{f)} 09 02 464 6825 ^{b)} 09 02 764 6825 ^{c)}	09 02 264 2825	
	64			09 02 264 6829 ^{d)}		
Female connector with solder pins 13 mm	64			09 02 264 6421		
Female connector with press-in pins 4.5 mm	64			09 02 264 6850 09 02 264 6850 222 ^{f)}	09 02 264 2850	
Female connector with press-in pins without flange 5.3 mm	64			09 02 264 6870		
Female connector with press-in pins 13.2 mm	64			09 02 264 6861 ^{a)}		
Female connector with wrap posts ¹⁾ 13 mm	64			09 02 264 6821		
Female connector with solder lugs 5.2 mm	64			09 02 264 6823		

¹⁾ To be used only for wire-wrap termination

^{d)} CTL - 400