



## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)  
[09110006135](#)

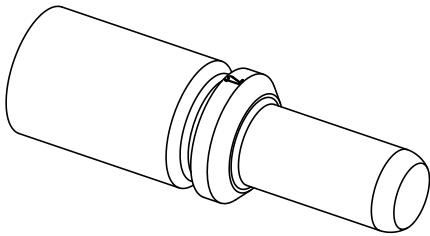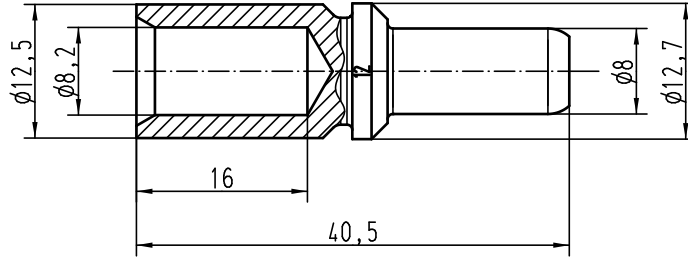

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Für Litzenleiter feindrähtig nach VDE 0295 Klasse5 / IEC 60228 Klasse5  
For stranded fine wire acc.to VDE 0295 class5 / IEC 60228 class5

Leiterquerschnitt / wire gauge: 35mm<sup>2</sup>

Abisolierlänge / stripping length: 16mm

 All Dimensions in mm Original Size DIN A 4			Techn. Character.			Nicht tolerierte Maße/ Free size tolerances		
						Maßstab/Scale  <b>2:1</b>	<b>Han TC100 Stiftkontakt</b> <i>Han TC100 male contact</i> versilbert / silver plated	
			Detail.	27.03.12	gru			
			Insp.		Tie			
			Stand.					
A			HARTING Electric GmbH & Co. KG				<b>TB 09 11 000 6135</b>	
Mod.	Dat.	Name	D-32339 Espelkamp					