


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09180167001](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

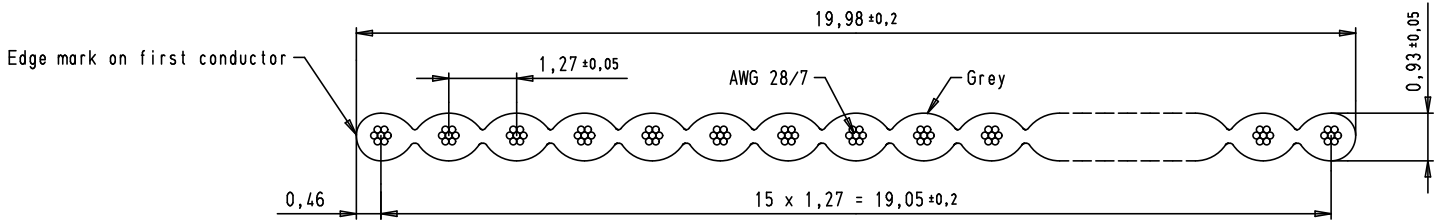

Wire _____ Tinned copper
Gauge _____ AWG 28/7 0,089 mm²
Voltage rating _____ 300 Vr.m.s
Current rating _____ 2,1A at 25°C
Capacity unbalanced _____ 45,9 pF/m at 1 MHz
Impedance unbalanced _____ 105 Ω
Propagation delay _____ 4,9 ns/m nominal
Insulation material _____ PVC
Temperature rating _____ -20°C (operating) to +105°C
 -30°C (static)
Flammability rating _____ Flame retardant VW1
Insulation resistance _____ 100 MΩ/km
Approval _____ UL AWM style 2651

09 18 016 7004	100 m (328 feet)
09 18 016 7001	30,48 m (100 feet)
Part number	Length per reel

				Det.	Name		SEK 18 flat cable 16 poles	Mößstab/ Scale 10:1	
				Detail.	20/10/05				JMDR
				Insp.					All Dim. in mm Orig. Size DIN A 4
				Stand.					
EC01360	19/02/10	SC							
34400	17/09/07	PK							
33246	20/10/05	JMDR							
Mod.	Det.	Name	HARTING EURL				TB 09 18 016 700X	Blatt/ Page 1 / 1	
			F-95972 Paris						

				Det.	Name		SEK 18 flat cable 16 poles	Mößstab/ Scale 10:1	
				Detail.	20/10/05				JMDR
				Insp.					All Dim. in mm Orig. Size DIN A 4
				Stand.					
EC01360	19/02/10	SC							
34400	17/09/07	PK							
33246	20/10/05	JMDR							
Mod.	Det.	Name	HARTING EURL				TB 09 18 016 700X	Blatt/ Page 1 / 1	
			F-95972 Paris						