

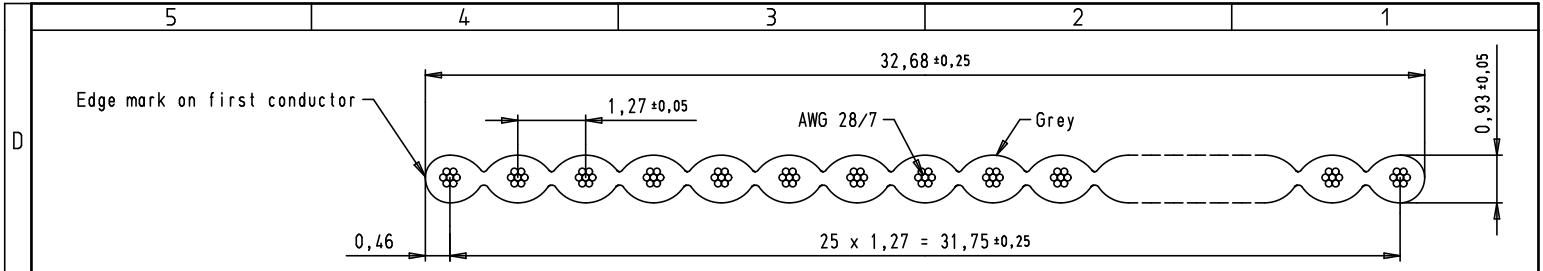
Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Harting](#)
[09180267001](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



- Wire ————— Tinned copper
- Gauge ————— AWG 28/7 0,089 mm²
- Voltage rating ————— 300 Vr.m.s
- Current rating ————— 2,1A at 25°C
- Capacity unbalanced ————— 45,9 pF/m at 1 MHz
- Impedance unbalanced ————— 105 Ω
- Propagation delay ————— 4,9 ns/m nominal
- Insulation material ————— PVC
- Temperature rating ————— -20°C (operating) to +105°C
-30°C (static)
- Flammability rating ————— Flame retardant VW1
- Insulation resistance ————— 100 MΩ/km
- Approval ————— UL AWM style 2651

09 18 026 7004	100 m (328 feet)	Grey
09 18 026 7001 001	30,48 m (100 feet)	Black
09 18 026 7001	30,48 m (100 feet)	Grey
Part number	Length per reel	Color

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4
EC01360	19/02/10	SC	Detail.	20/10/05 JMDR	
34400	17/09/07	PK	Insp.		
33788	24/07/06	PK	Stand.		
33246	20/10/05	JMDR	HARTING EURL F-95972 Paris		
Mod.	Del.	Name			

SEK 18 flat cable 26 poles	Majstab/ Scale 10:1
TB 09 18 026 700X	Blatt/ Page 1/1
Sub.	