

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09180347008](#)

For any questions, you can email us directly:
sales@integrated-circuit.com


Alle Rechte vorbehalten/ All rights reserved

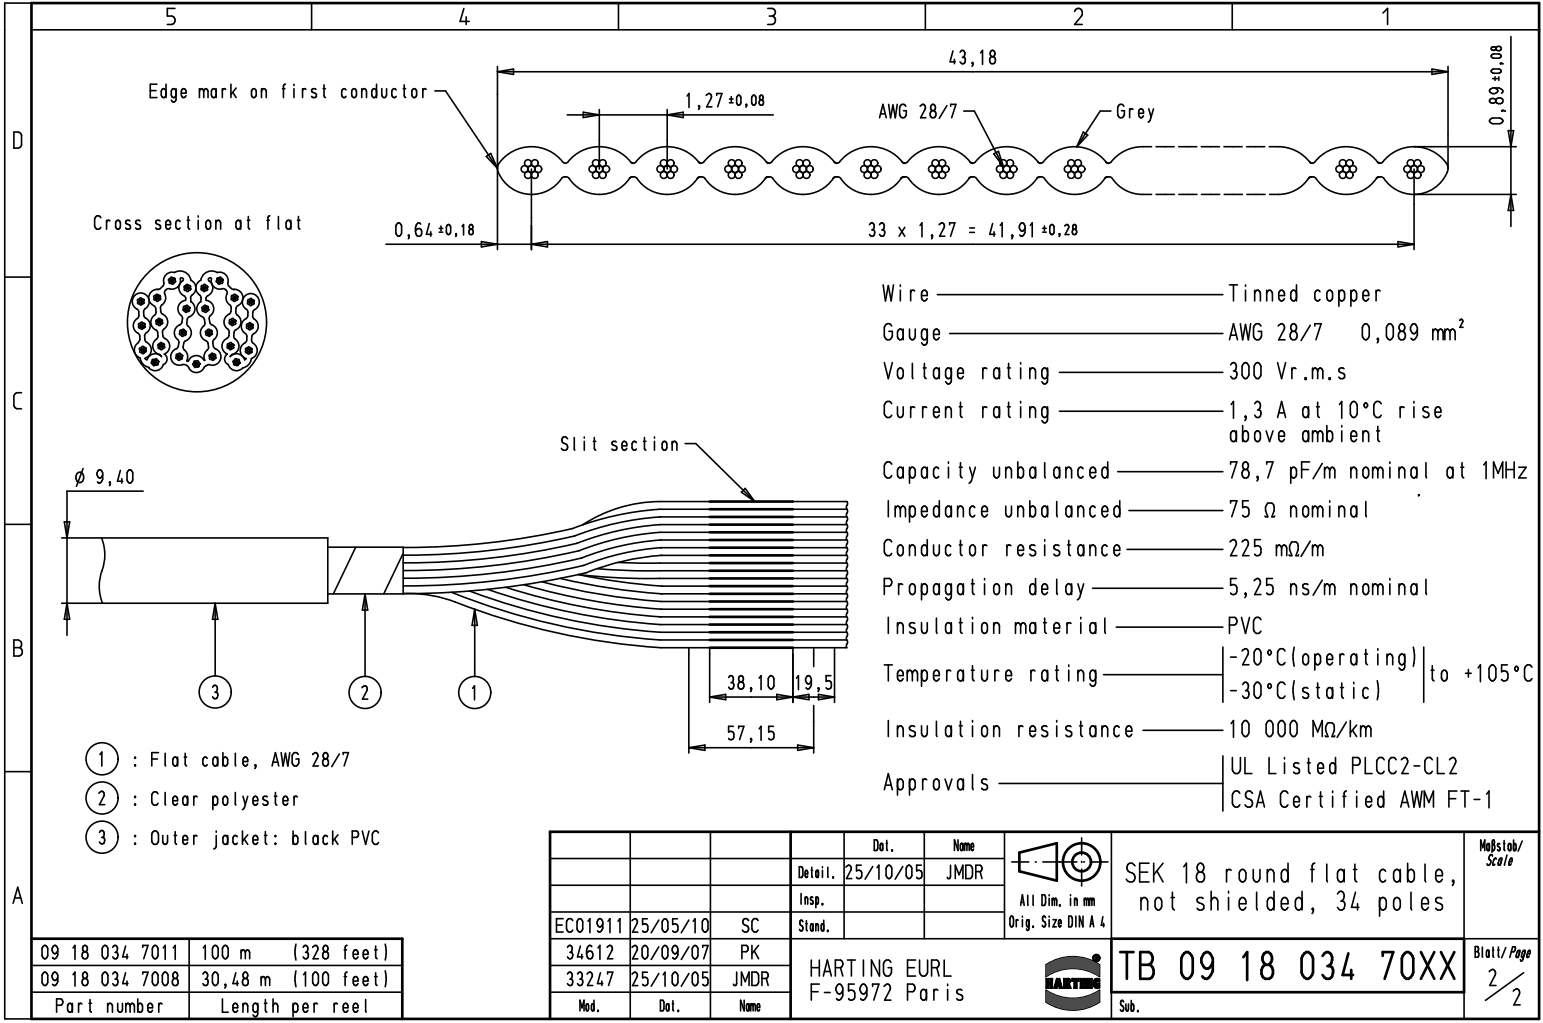

- Wire ————— Tinned copper
- Gauge ————— AWG 28/7 0,089 mm²
- Voltage rating ————— 300 Vr.m.s
- Current rating ————— 1,3 A at 10°C rise above ambient
- Capacity unbalanced ————— 78,7 pF/m nominal at 1MHz
- Impedance unbalanced ————— 75 Ω nominal
- Conductor resistance ————— 225 mΩ/m
- Propagation delay ————— 5,25 ns/m nominal
- Insulation material ————— PVC
- Temperature rating ————— | -20°C(operating) | to +105°C
| -30°C(static) |
- Insulation resistance ————— 10 000 MΩ/km
- Approvals ————— | UL Listed PLCC2-CL2
| CSA Certified AWM FT-1

- ① : Flat cable, AWG 28/7
- ② : Clear polyester
- ③ : Outer jacket: black PVC

09 18 034 7011	100 m (328 feet)
09 18 034 7008	30,48 m (100 feet)
Part number	Length per reel

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4
		Detail.	25/10/05	JMDR	
		Insp.			
EC01911	25/05/10	SC	Stand.		
34612	20/09/07	PK			
33247	25/10/05	JMDR			
Mod.	Det.	Name	HARTING EURL F-95972 Paris		

SEK 18 round flat cable, not shielded, 34 poles	Meßstab/ Scale
TB 09 18 034 70XX	Blatt/ Page 2/2
Sub.	