

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[Harting](#)
[09180407006](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Alle Rechte vorbehalten/ All rights reserved

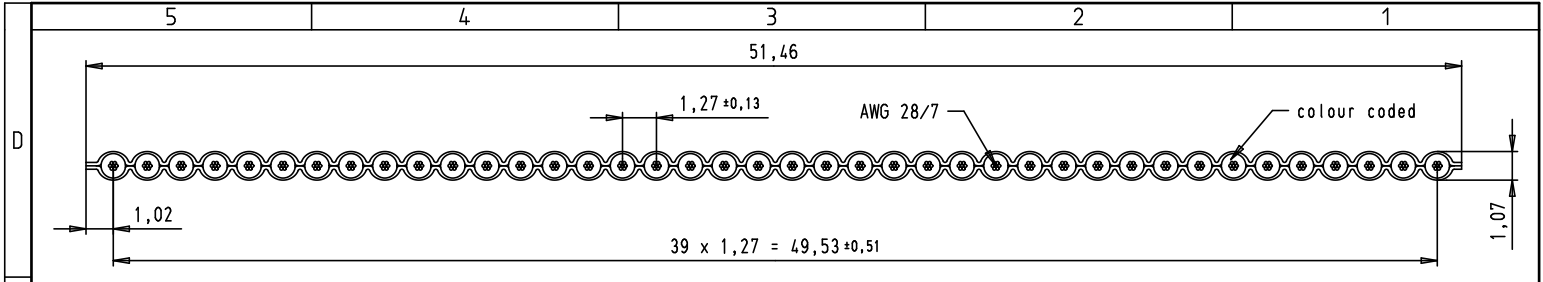

- Wire _____ Cu tinned
- Gauge _____ AWG 28/7
- Voltage rating _____ 300 Vr.m.s
- Conductor resistance _____ 221 mΩ/m
- Capacity unbalanced _____ 49 pF/m
- Impedance unbalanced _____ 105 Ω
- Signal delay _____ 5,2 ns/m
- Insulation material _____ PVC
- Temperature rating _____ -20°C to +105°C
- Flammability rating _____ UL: VW1
- Insulation resistance _____ 1000 MΩ/km

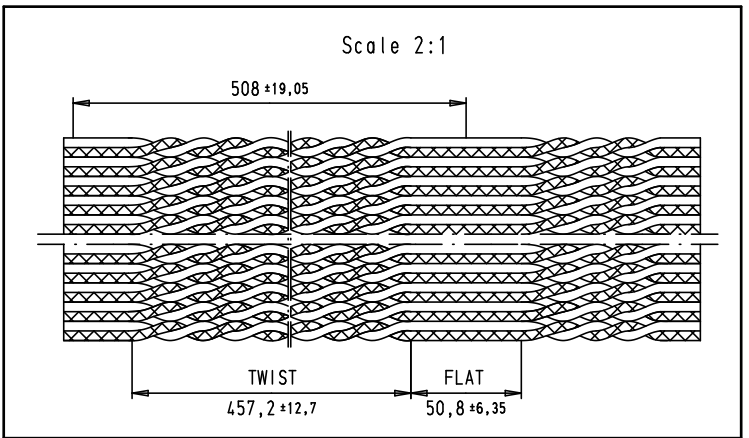

Colour code sequence (in 10 steps):
brown, red, orange, yellow, green,
blue, violet, grey, white, black

			Det.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable 40 poles, twisted pair, length per reel: 30,48 m colour coded, UL 20130, IEC 918	Meßstab/ Scale	
		Detail.	25/10/05	JMDR			5:1	
		Insp.						
		Stand.					Blatt/ Page	
33990	15/05/07	PK	HARTING EURL F-95972 Paris				TB 09 18 040 7006	1/1
33247	25/10/05	JMDR						
Mod.	Det.	Name						