

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)
[09180507008](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

Alle Rechte vorbehalten/ All rights reserved

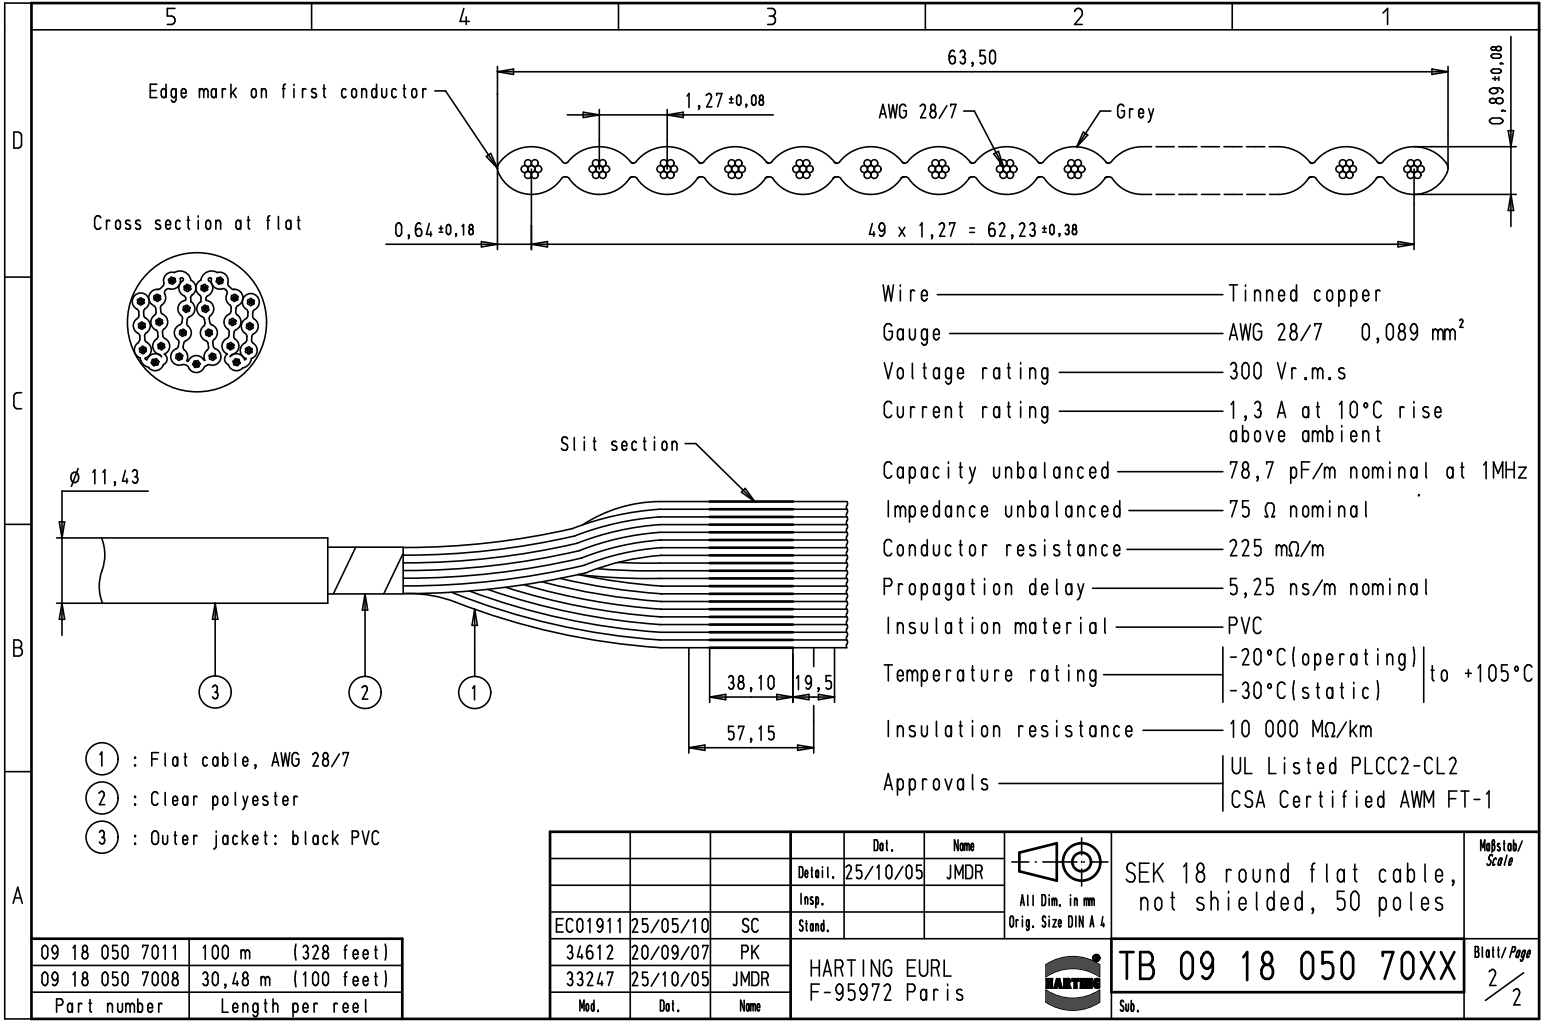

- Wire ————— Tinned copper
- Gauge ————— AWG 28/7 0,089 mm²
- Voltage rating ————— 300 Vr.m.s
- Current rating ————— 1,3 A at 10°C rise above ambient
- Capacity unbalanced ————— 78,7 pF/m nominal at 1MHz
- Impedance unbalanced ————— 75 Ω nominal
- Conductor resistance ————— 225 mΩ/m
- Propagation delay ————— 5,25 ns/m nominal
- Insulation material ————— PVC
- Temperature rating ————— | -20°C(operating) | to +105°C
| -30°C(static) |
- Insulation resistance ————— 10 000 MΩ/km
- Approvals ————— | UL Listed PLCC2-CL2
| CSA Certified AWM FT-1

- ① : Flat cable, AWG 28/7
- ② : Clear polyester
- ③ : Outer jacket: black PVC

| | |
|----------------|--------------------|
| 09 18 050 7011 | 100 m (328 feet) |
| 09 18 050 7008 | 30,48 m (100 feet) |
| Part number | Length per reel |

| | | | | | |
|---------|----------|---------|-------------------------------|------|--------------------------------------|
| | | | Det. | Name | |
| | | Detail. | 25/10/05 | JMDR | |
| | | Insp. | | | |
| | | Stand. | | | All Dim. in mm Orig. Size DIN A 4 |
| EC01911 | 25/05/10 | SC | HARTING EURL F-95972 Paris | | |
| 34612 | 20/09/07 | PK | | | |
| 33247 | 25/10/05 | JMDR | | | |
| Mod. | Det. | Name | | | |

| | |
|---|--------------------|
| SEK 18 round flat cable, not shielded, 50 poles | Meßstab/ Scale |
| TB 09 18 050 70XX | Blatt/ Page 2/2 |
| Sub. | |