Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

Harting
09180647001

For any questions, you can email us directly:
sales@integrated-circuit.com

Distributor of Harting: Excellent Integrated System Limited
Datasheet of 09180647001 - CBL RIBN 64COND 0.050 GRAY 100'
Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Alle Rechte vorbehalten/ *All rights reserved*

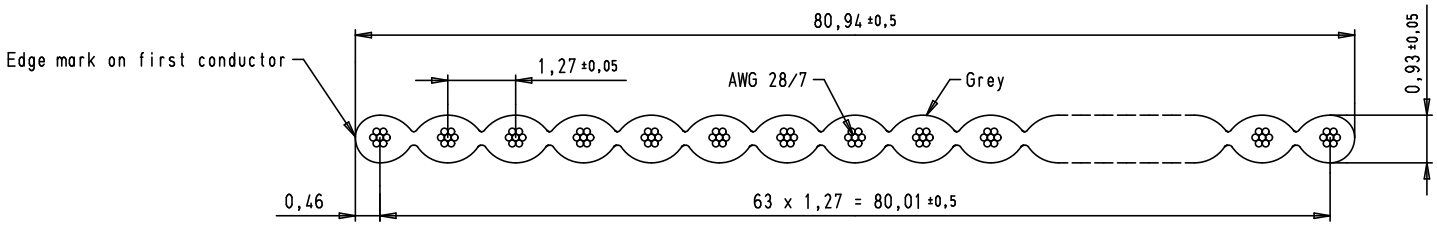

Wire	Tinned copper
Gauge	AWG 28/7 0,089 mm²
Voltage rating	300 Vr.m.s
Current rating	2,1A at 25°C
Capacity unbalanced	45,9 pF/m at 1 MHz
Impedance unbalanced	105 Ω
Propagation delay	4,9 ns/m nominal
Insulation material	PVC
Temperature rating	-20°C (operating) / -30°C (static) to +105°C
Flammability rating	Flame retardant VW1
Insulation resistance	100 MΩ/km
Approval	UL AWM style 2651

Part number	Length per reel
09 18 064 7004	100 m (328 feet)
09 18 064 7001	30,48 m (100 feet)

Mod.	Dat.	Name
EC01360	19/02/10	SC
34400	18/09/07	PK
33246	20/10/05	JMDR

	Dat.	Name
Detail.	20/10/05	JMDR
Insp.		
Stand.		

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

SEK 18 flat cable
64 poles

TB 09 18 064 700X

Sub.

Maßstab/ *Scale* 10:1

Blatt/ *Page* 1/1