

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Harting](#)

[09662556513](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

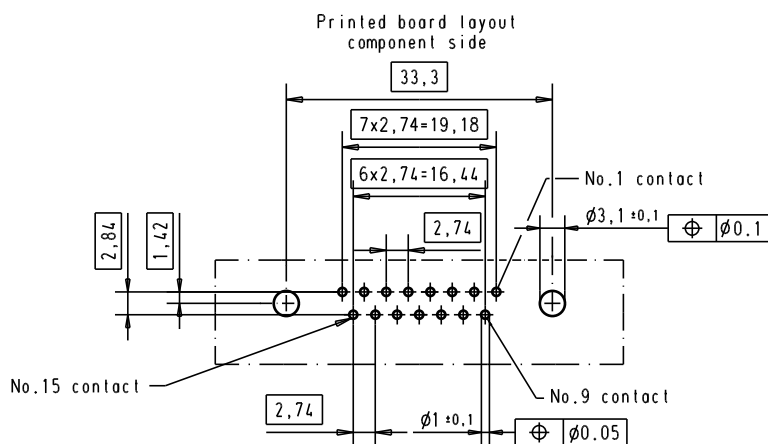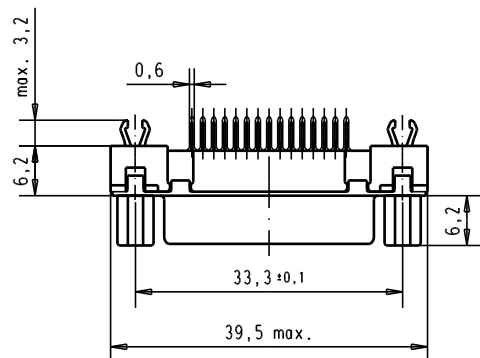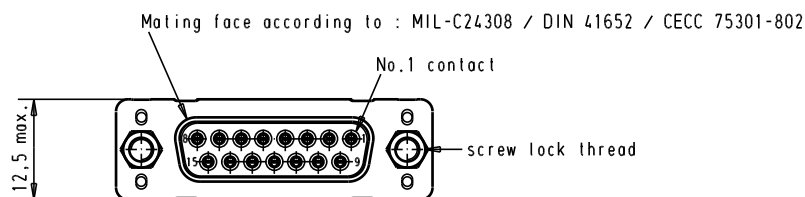

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 66 255 3533	M3	1					Dét.	Name		D-sub, High temperature, 15 poles, female, straight, with solder pins 2.9, screw lock and grounding board lock.	Moûtab/ Scale
09 66 255 6533	M3	2				Détail.	04/09/02	YT			
09 66 255 7533	M3	3				Insp.					
09 66 255 3513	4-40 UNC	1				Stand.					
09 66 255 3513	4-40 UNC	1							All Dim. in mm Orig. Size DIN A 4	1,5:1	
09 66 255 6513	4-40 UNC	2	31892	05/05/04	JH	HARTING EURL F-95972 Paris		TB 09 66 255 x5x3			
09 66 255 7513	4-40 UNC	3	31084	04/09/02	YT						
Part number	Screw lock thread	Performance level	Mod.	Dét.	Name						