



Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[NorComp](#)
[800-002-LP1-001](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

DESCRIPTION: 2MM SHUNT LOW PROFILE, .075" 15 MICRONINCH GOLD

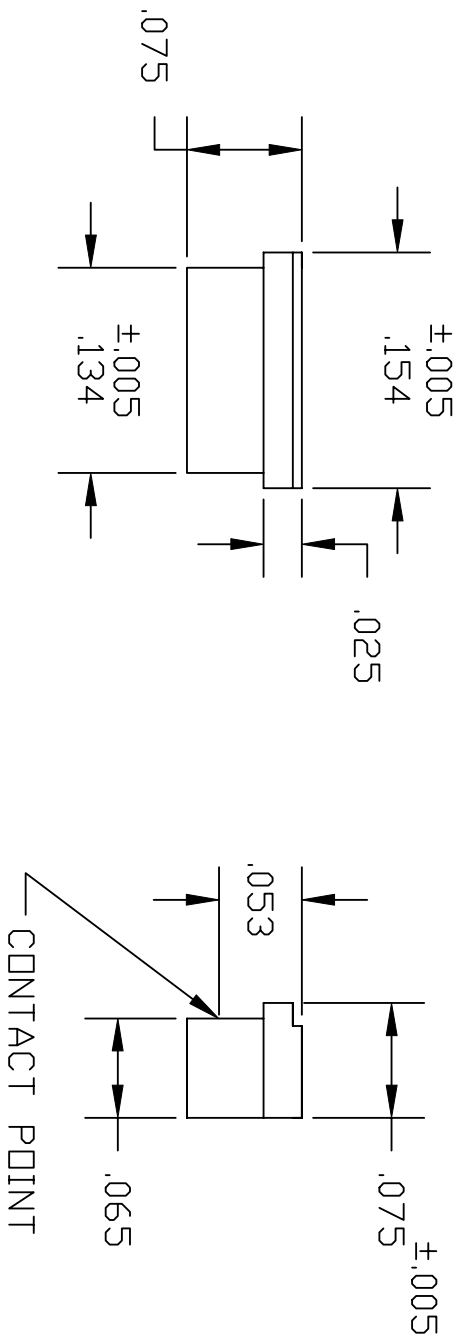

MATERIAL: HOUSING: GLASS FILLED THERMOPLASTIC, UL 94V-D, BLACK

CONTACT: HIGH PERFORMANCE COPPER ALLOY

PLATING: 15 MICRO-INCHES PALLADIUM/NICKEL WITH GOLD FLASH OVERALL

ELECTRICALS: CURRENT RATING: 1.0 AMPERE MAX.

CONTACT RESISTANCE: 30 MILLIOHM MAX.

DMV: 500 V_{rms} MIN.

INSULATION RESISTANCE: 1 X 10⁴ MOHMS

OPERATING TEMP: -55°C TO 105°C



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS
 DATE: 12-13-01

CHECKED: DATE:

SCALE: SHEET 1 OF 1 REV 1

DWG NO. 800-002-LP1-001

NorComp