

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic Electronic Components](#)


[LNJ210C62RA](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

| Approved | Checked | Designed | DEVELOPMENT SPECIFICATION | | | | |
|--|----------------|--------------------------|--------------------------------------|------------------|--|---------|----------|
| | | <i>K. Shikama</i> | Tentative <u>P/N: LNJ210C62RA</u> | | | | |
| TYPE | | Red Emitting Diode | | | | | |
| APPLICATION | | Indicators | | | | | |
| MATERIAL | | InGaAlP | | | | | |
| OUTLINE | | Attached | | | | | |
| ABSOLUTE MAXIMUM RATINGS | | P | *1 I _{FP} | I _{FDC} | V _R | Topr | Tsig |
| | | 55 | 60 | 20 | 4 | -25~+85 | -30~+100 |
| | | mW | mA | mA | V | °C | °C |
| CONDITION | | Ta=25±3 °C | | | | | |
| Test Specification | | | | | | | |
| Item | Symbol | Condition | Typ. | Limit | | Unit | |
| | | | | Min | Max | | |
| Forward Voltage | V _F | I _F =10 mA | 1.92 | | 2.5 | V | |
| Reverse Leakage Current | I _R | V _R = 4 V | | 12 | 100 | μA | |
| Luminous Intensity *2 | I _O | I _F =10 mA DC | 23 | 12 | | mcd | |
| Peak Emission Wavelength | λ _p | I _F =10 mA DC | 645 | | | nm | |
| Spectral Line Half Width | Δλ | I _F =10 mA DC | 15 | | | nm | |
| <p>*1 · The Condition of I_{FP} is duty 10 % , Pulse width 1 ms · Please contact the Panasonic local office if you design at low current (below 1 mA DC) or pulse current operation and have any questions.</p> <p>*2 Measurement Tolerance is ±20%.</p> | | | | | | | |
| <p>NOTE</p> <p>★1. Terminal:Plated with gold on copper base.</p> <p>★2. Beware of destruction by static electricity in handling the LED.</p> <p>★3. Package : Clear type.</p> <p>★4. Soldering conditions. Refer to Handling note.</p> <p>★5. Care should be taken that soldering is done within 3-days after opening the dry package and reel.</p> <p>★6. Circuit to operate LED.</p> | | | | | | | |
| | | | | | (A) Recommended circuit. | | |
| | | | | | (B) The difference of brightness between the LED could be found due to the V _F characteristics of each LED. | | |
| Oct. 20. 2001 | | | | | | | |


| | | | |
|----------|---------|------------------|---------------------------|
| Approved | Checked | Designed | DEVELOPMENT SPECIFICATION |
| | | <i>K. J. ...</i> | |
| | | | Tentative |
| | | | P/N: LNJ210C62RA |

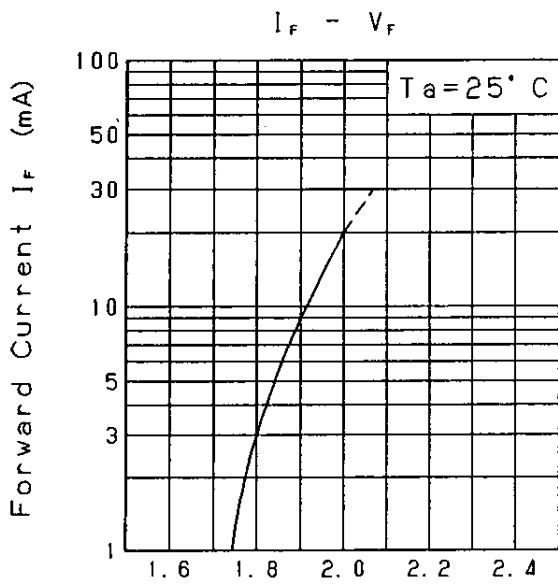


Forward Voltage V_F (V)

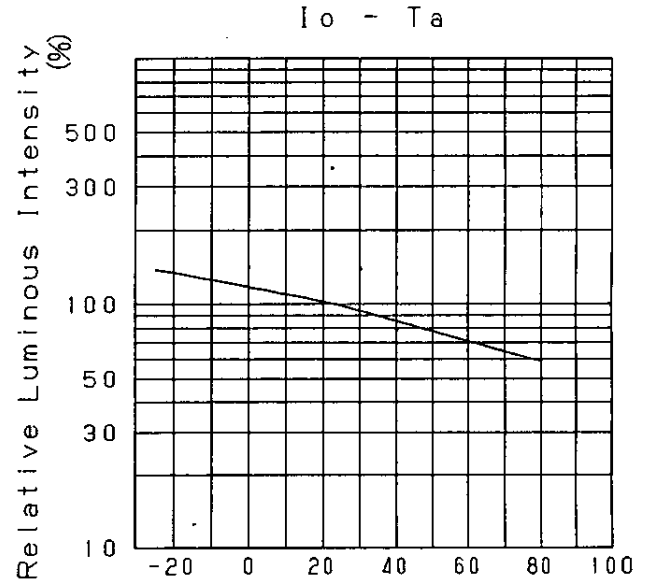

Ambient Temperature T_a (°C)

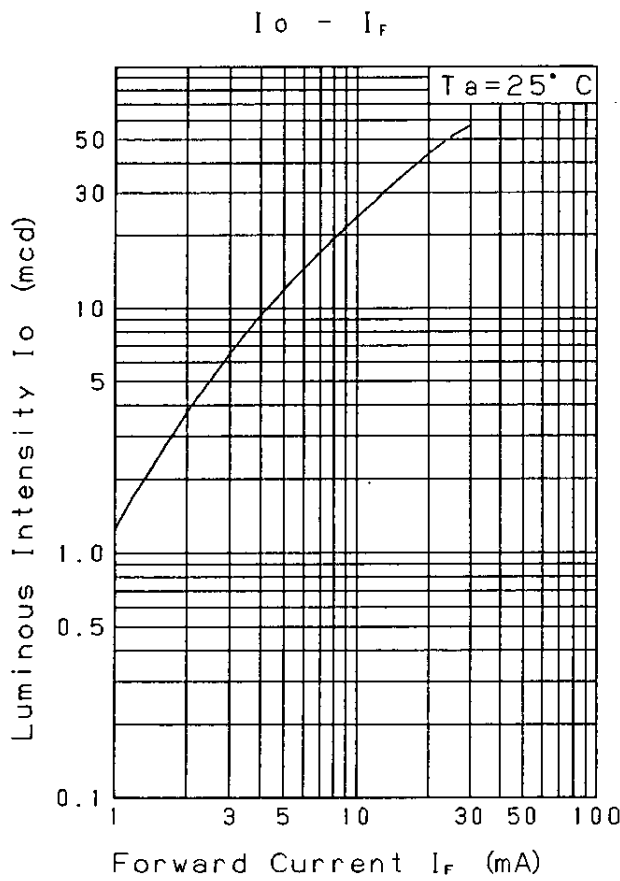

Forward Current I_F (mA)

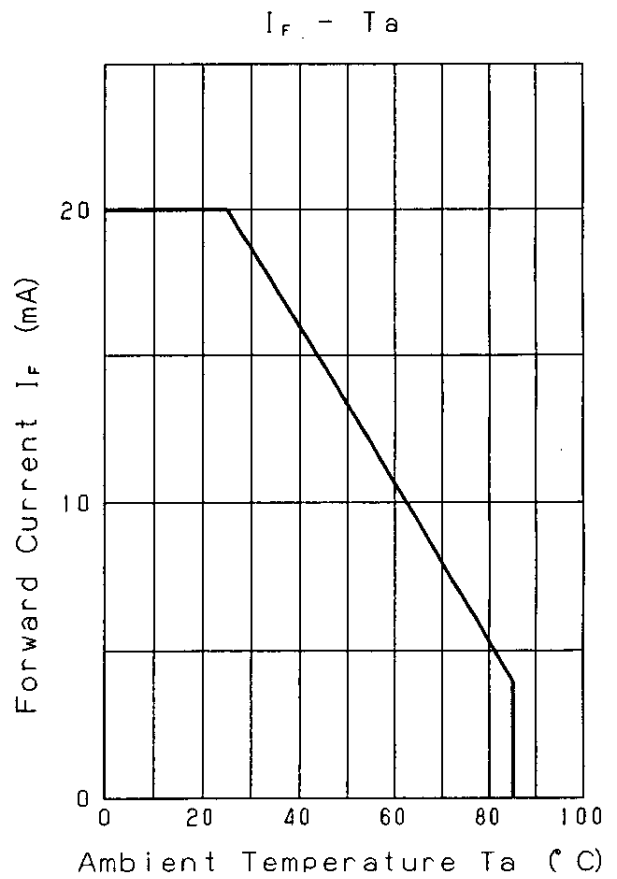


Ambient Temperature T_a (°C)


| | | |
|---------------|--|--|
| Oct. 20. 2001 | | |
|---------------|--|--|

| | | | | | | |
|----------|---------|------------------------------|-----------------------------|--|--|--|
| Approved | Checked | Designed <i>K. A. ...</i> | DEVELOPMENT SPECIFICATION | | | |
| | | | Tentative P/N : LNJ210C62RA | | | |

Relative Luminous Intensity
Wavelength Characteristics


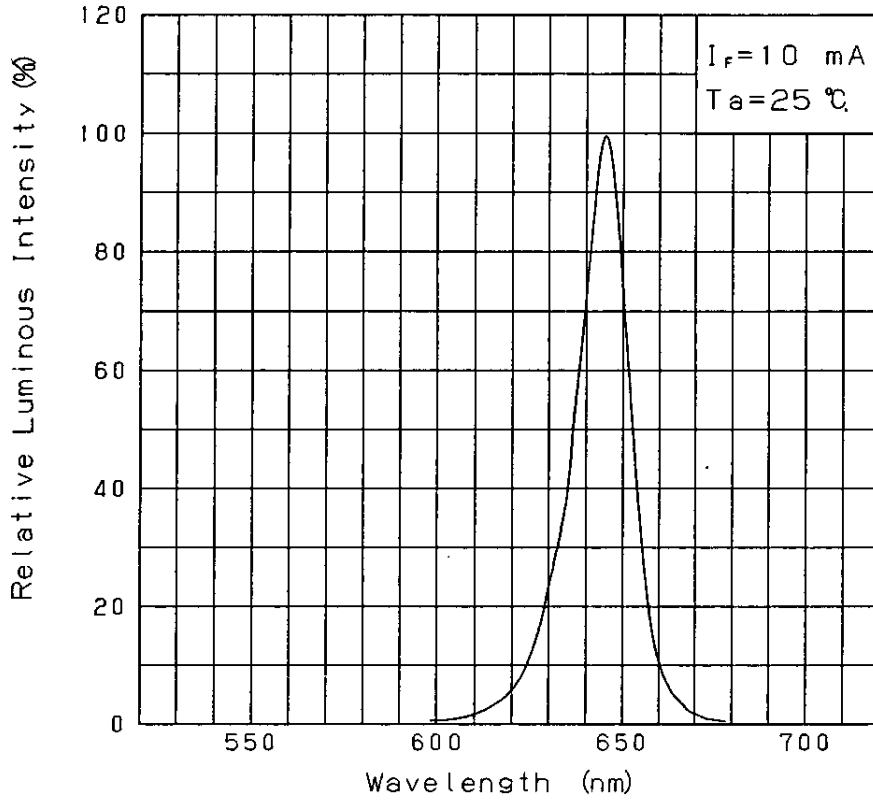


Directive Characteristics

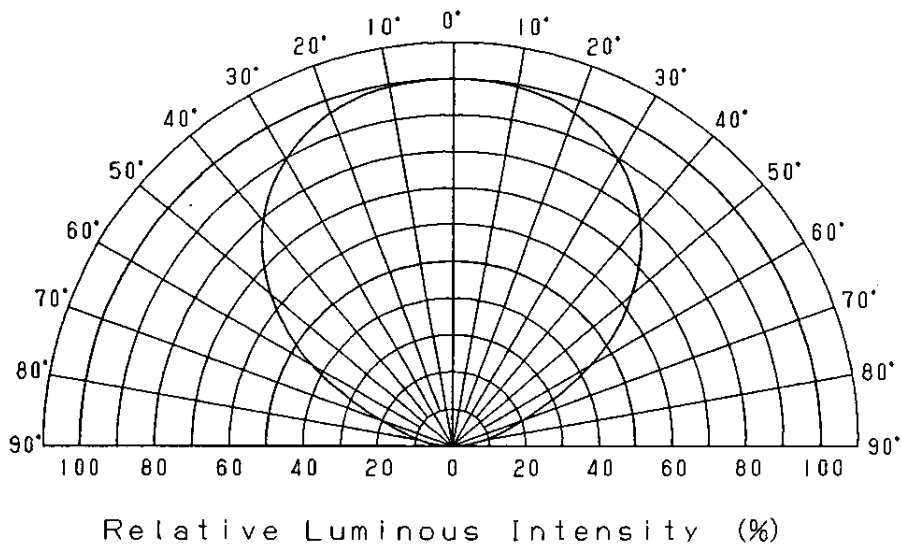

Oct. 20. 2001

| | | | | | | |
|----------|---------|-------------------------------|--|--|--|--|
| Approved | Checked | Designed <i>K. Sakurai</i> | DEVELOPMENT SPECIFICATION (OUTLINE) Tentative P/N: LNJ210C62RA | | | |
| | | | | | | |

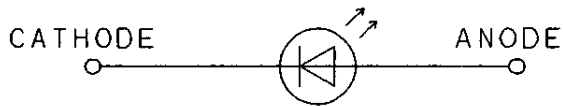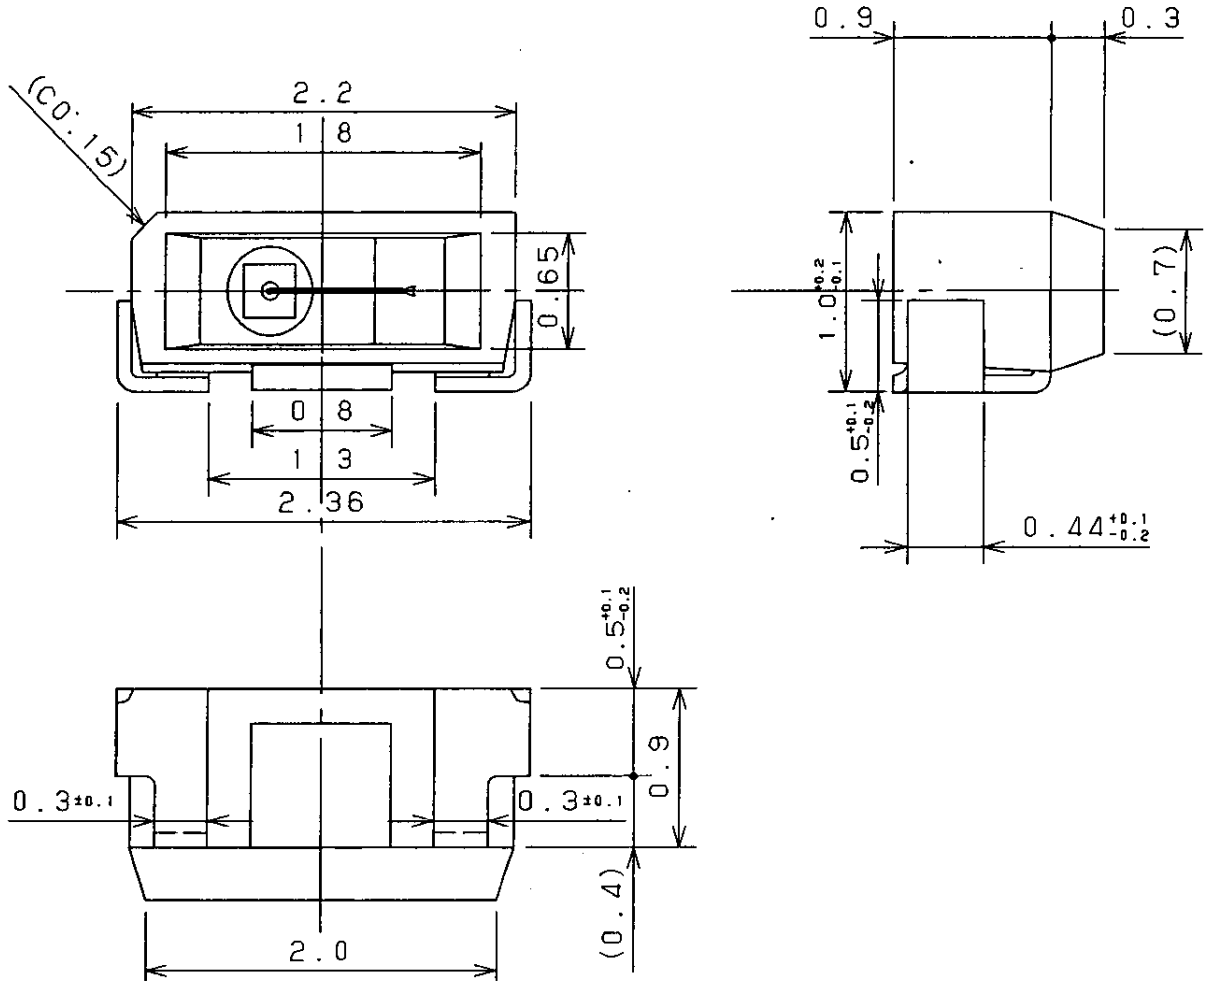

(NOTE)
 1. Unit: mm
 2. Tolerance unless specified is ±0.15.