

# **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


HellermannTyton 181-91509

For any questions, you can email us directly: <u>sales@integrated-circuit.com</u>



# HellermannTyton

# 181-91509

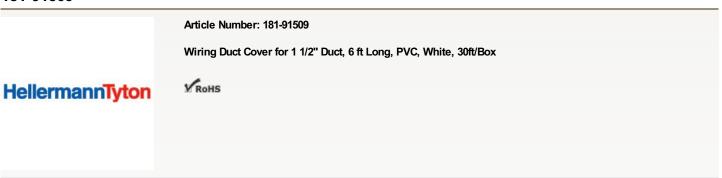

#### Base Data

Download spec sheet

| Local Order Number    | 181-91509  |
|-----------------------|--|
| Туре                  | TC1.5  |
| Color                 | White (WH)   |
| Features and Benefits | <ul> <li>A temporary film is applied to the covers to protect against scratches and is writable for identification during installation.</li> <li>Cover is flush with the side of the duct for increased wire capacity and allows for tight, side by side duct placement.</li> <li>Covers are provided with a non-slip lining, which insures the covers remain in place during vibration, yet they easily snap on and off. (Covers to be purchased separately)</li> </ul> |
| Product Description   | HellermannTyton's Pro-Duct wiring duct covers are sold separately and interchangeable among the 3 styles of duct (solid, slotted and high density). Manufactured from high impact, rigid PVC, Pro-Duct covers come in standard colors of white, gray and black. Wiring duct covers are available in 6 foot lengths.  |
| Short Description     | Wiring Duct Cover for 1 1/2" Duct, 6 ft Long, PVC, White, 30ft/Box   |

### **Product Dimensions**

| Length L (Imperial) | 6.0 ft  |
|---------------------|---------|
| Length L (Metric)   | 1.83 m  |
| Width W (Imperial)  | 1.5 "   |
| Width W (Metric)    | 38.1 mm |
|                     |         |

## Logistics and Packaging

| Quantity Per              | box      |
|---------------------------|----------|
| Package Quantity          | 30.0 ft  |
| Package Quantity (Metric) | 9.1 m    |
| Carton Quantity           | 120.0 ft |

### **Material and Specifications**

| Material                    | Polyvinylchloride (PVC) |
|-----------------------------|-------------------------|
| Material Shortcut           | PVC                     |
| Flammability                | self-extinguishing      |
| Halogenfree                 | No                      |
| Operating Temperature       | +122°F (+50°C)          |
| ROHS Compliant              | Yes                     |
| Certification/Specification | UL<br>CSA               |
| III Listed (US and Canada)  | No                      |



UL Recognized (US) Yes

UL Recognized (US and Canada) No

© HellermannTyton 2015