

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1704327](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

https://www.phoenixcontact.com/us/products/1704327



Printed-circuit board connector - PST 1,3/ 4-LH-5,0 - 1704327

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 14 A, Rated voltage (III/2): 400 V, Number of positions: 4, Pitch: 5 mm, Color: black, Contact surface: Tin, Assembly: Soldering, Voltage and current depend on the plug-in terminal block used.



The figure shows a 10-position version of the product

Product Features

- Patented coding available on request
- 5.0 mm pitch
- Reliable contact system with high current carrying capacity
- Very stable thanks to the L-shaped base strips
- Highly flexible conductor protection for easy, repeated connection
- Plug-in system with a total of five plug-in options



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	1.68 GRM
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Length	10.8 mm
Pitch	5 mm
Dimension a	15 mm
Pin dimensions	1,3 mm
Hole diameter	1.5 mm

General

Range of articles	PST 1,3/..-LH
-------------------	---------------

https://www.phoenixcontact.com/us/products/1704327



Printed-circuit board connector - PST 1,3/ 4-LH-5,0 - 1704327

Technical data

General

Insulating material group	IIIb
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	13.5 A (depends on the plug used)
Maximum load current	13.5 A (depends on the plug used)
Insulating material	PA
Inflammability class according to UL 94	V0
Color	black
Number of positions	4

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	34131203
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

<https://www.phoenixcontact.com/us/products/1704327>



Printed-circuit board connector - PST 1,3/ 4-LH-5,0 - 1704327

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized		
	B	D
Nominal current IN	10 A	10 A
Nominal voltage UN	300 V	300 V

cUL Recognized		
	B	D
Nominal current IN	10 A	10 A
Nominal voltage UN	300 V	300 V

GOST		
------	--	--

GOST		
------	--	--

cULus Recognized		
------------------	--	--


<https://www.phoenixcontact.com/us/products/1704327>




Printed-circuit board connector - PST 1,3/ 4-LH-5,0 - 1704327

Drawings

Drilling diagram

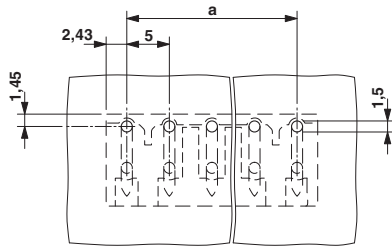

Diagram

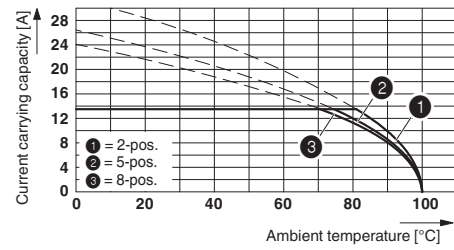

Derating diagram in connection with PT 2,5/...-PVH-5,0; reduction factor=0.8; conductor cross section=4 mm²

Dimensioned drawing

