

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1677050](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

https://www.phoenixcontact.com/us/products/1677050



## Contact insert - HC-A 16-EBUC-32 - 1677050


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON female insert, A16 series, 16-pos., crimp connection, numbering from 17 ... 32



### Key commercial data

Packing unit	1 pc
GTIN	 4 017918 129675
Weight per Piece (excluding packing)	43.02 GRM
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### General

Note	For HC-D25 / HC-D50 housing, crimp contact CK2,5-ED (crimp contacts not included in scope of supply)
Connection method	Crimp connection
Pollution degree	3
Surge voltage category	III
Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Number of positions	16+PE
Insertion/withdrawal cycles	≥ 500
Type	D25

https://www.phoenixcontact.com/us/products/1677050



## Contact insert - HC-A 16-EBUC-32 - 1677050

### Technical data

#### General

Connection in acc. with standard	IEC / EN
Conductor cross section	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Connection cross section AWG	20 ... 12
Stripping length of the individual wire	8 mm
Assembly instructions	Connectors may be operated only when there is no load/voltage.

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

#### Material data

Inflammability class according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA

#### Electrical characteristics

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
Rated current	16 A

### Classifications

#### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

#### ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC000438

#### UNSPSC

UNSPSC 6.01	31251501
-------------	----------

https://www.phoenixcontact.com/us/products/1677050



## Contact insert - HC-A 16-EBUC-32 - 1677050

### Classifications

#### UNSPSC

UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

### Approvals

#### Approvals


#### Approvals


CSA / UL Recognized / GOST / cUL Recognized / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

CSA 	
mm <sup>2</sup> /AWG/kcmil	20-13
Nominal current I <sub>N</sub>	10 A
Nominal voltage U <sub>N</sub>	600 V

UL Recognized 	
Nominal voltage U <sub>N</sub>	600 V

GOST 	
--	--

https://www.phoenixcontact.com/us/products/1677050



# Contact insert - HC-A 16-EBUC-32 - 1677050


## Approvals

cUL Recognized	
Nominal voltage UN	600 V


cULus Recognized	
------------------	--

## Drawings

Dimensioned drawing

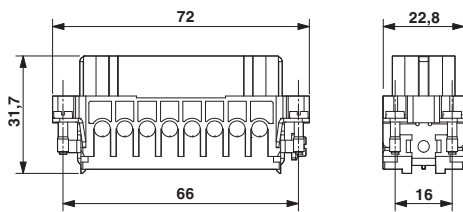


Diagram

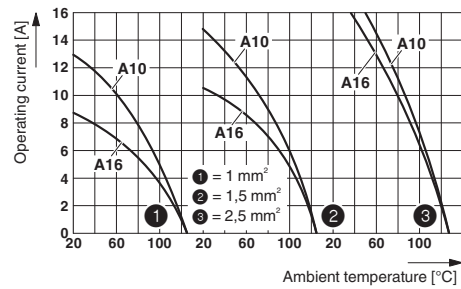


## Female insert

Derating diagram: HC-A...C series

Dimensioned drawing

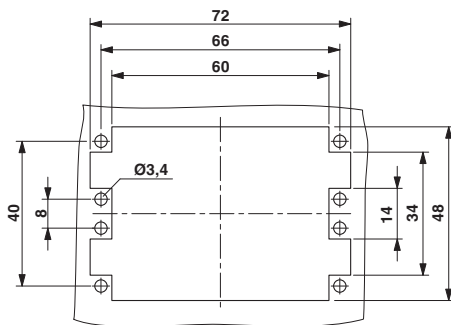

Schematic diagram



Connector pin assignment, connection side

## Panel cutout