

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1598203](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

https://www.phoenixcontact.com/us/products/1598203



Device connector, front mounting - RC-12P2N8A2200 - 1598203

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Device connector for front wall, straight, shielded: Yes, Screw locking, M23, Number of positions: 12, Type of contact: Male connector, Crimp connection, Flat gasket, 4xØ2,7, Flange dimensions: 25 mm x 25 mm, Panel thickness min.: 1 mm



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	26.04 GRM
Custom tariff number	74153300
Country of origin	Germany

Technical data

Product type	Circular connectors (device side)
Number of positions	12
Coding	N
Type	Device connector for front wall
Mounting type	4xØ2,7
Rated current (IEC)	8
Rated voltage (IEC)	150
Thread	M23
Shielding	Yes
Signal type	Signal

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440103

https://www.phoenixcontact.com/us/products/1598203



Device connector, front mounting - RC-12P2N8A2200 - 1598203

Classifications

ETIM


ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC001121

UNSPSC


UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Drawings

Schematic diagram



Dimensioned drawing

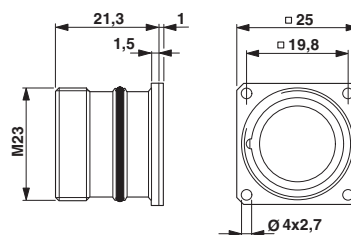

RC-0000002200
Flat gasket