

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Vishay Semiconductor/Diodes Division](#)
[209CNQ135](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


Bulletin PD-20722 rev. B 07/01

International IOR Rectifier

209CNQ... SERIES

SCHOTTKY RECTIFIER

200 Amp




Major Ratings and Characteristics

Characteristics	209CNQ...	Units
$I_{F(AV)}$ Rectangular waveform	200	A
V_{RRM} range	135 to 150	V
I_{FSM} @tp = 5 μ s sine	10,000	A
V_F @100Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.71	V
T_J range	-55 to 175	$^\circ\text{C}$

Description/Features

The 209CNQ center tap Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175 $^\circ\text{C}$ junction temperature. Typical applications are in high current switching power supplies, plating power supplies, UPS systems, converters, free-wheeling diodes, welding, and reverse battery protection.

- 175 $^\circ\text{C}$ T_J operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

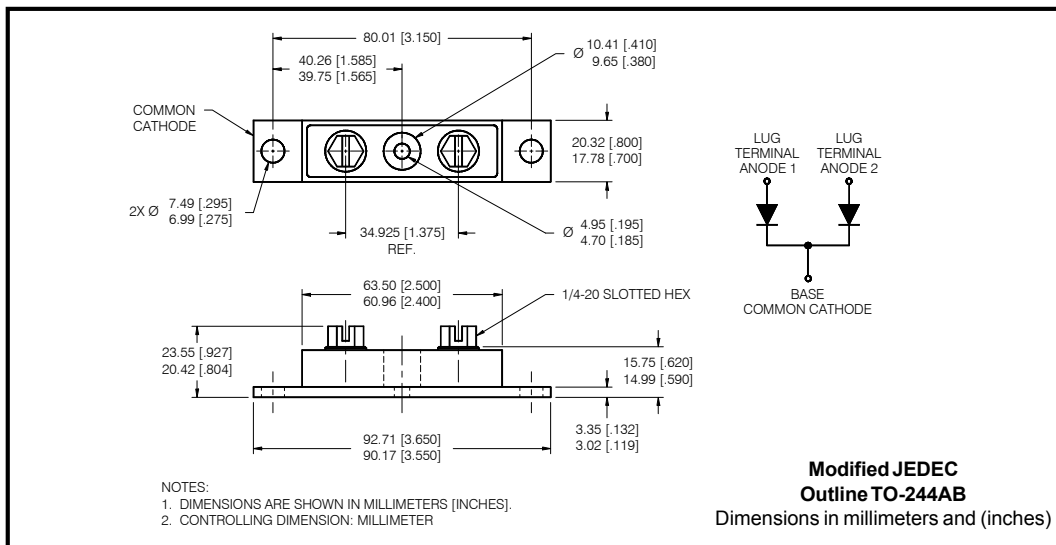

209CNQ... Series

Bulletin PD-20722 rev. B 07/01

 International
IRF Rectifier

Voltage Ratings

Partnumber	209CNQ135	209CNQ150
V _R Max. DC Reverse Voltage (V)	135	150
V _{RWM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	209CNQ	Units	Conditions
I _{F(AV)} Max. Average Forward Current (Per Leg) * See Fig. 5 (Per Device)	100	A	50% duty cycle @ T _C = 118°C, rectangular waveform
	200		
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	10,000	A	Following any rated load condition and with rated V _{RRM} applied 5μs Sine or 3μs Rect. pulse 10ms Sine or 6ms Rect. pulse
	1200		
E _{AS} Non-Repetitive Avalanche Energy (Per Leg)	15	mJ	T _J = 25°C, I _{AS} = 1 Amps, L = 30 mH
I _{AR} Repetitive Avalanche Current (Per Leg)	1	A	Current decaying linearly to zero in 1 μsec Frequency limited by T _J max. V _A = 1.5 x V _R typical

Electrical Specifications

Parameters	209CNQ	Units	Conditions
V _{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	1.03	V	@ 100A
	1.22	V	@ 200A
	0.71	V	@ 100A
	0.82	V	@ 200A
I _{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	3	mA	T _J = 25°C
	45	mA	T _J = 125°C
C _T Max. Junction Capacitance (Per Leg)	3000	pF	V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25°C
L _S Typical Series Inductance (Per Leg)	7.0	nH	From top of terminal hole to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V _R)	10000	V/μs	

(1) Pulse Width < 300μs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	209CNQ	Units	Conditions
T _J Max. Junction Temperature Range	-55 to 175	°C	
T _{stg} Max. Storage Temperature Range	-55 to 175	°C	
R _{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.40	°C/W	DC operation * See Fig. 4
R _{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.20	°C/W	DC operation
R _{thCS} Typical Thermal Resistance, Case to Heatsink	0.10	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	79(2.80)	g(oz.)	
T Mounting Torque	Min.	24(20)	Kg-cm (lbf-in)
	Max.	35(30)	
	Typ.	13.5(12)	
	Terminal Torque	Min.	
	Max.	46(40)	
Case Style	TO-244AB		Modified JEDEC

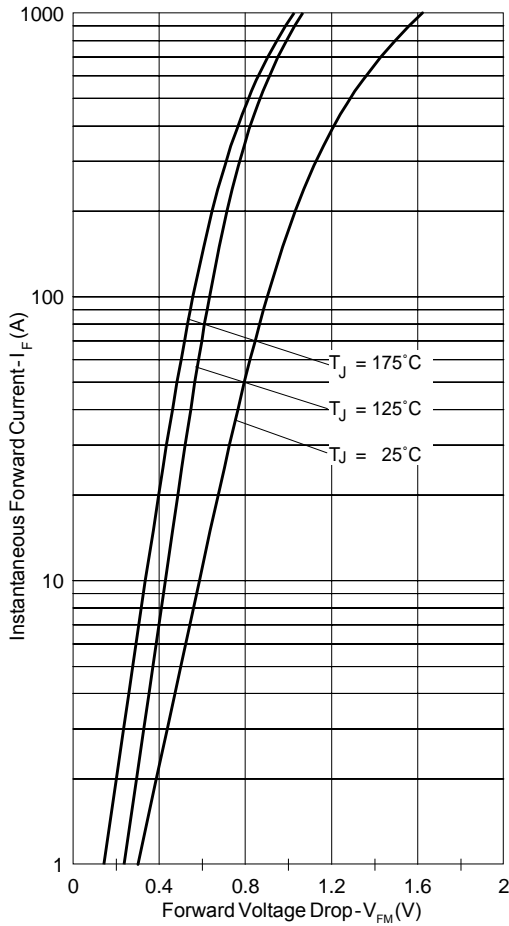


Fig. 1 - Max. Forward Voltage Drop Characteristics

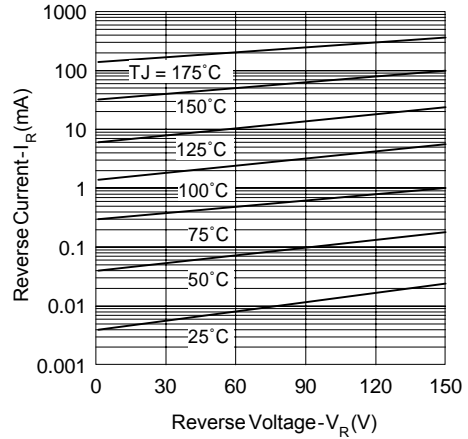


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

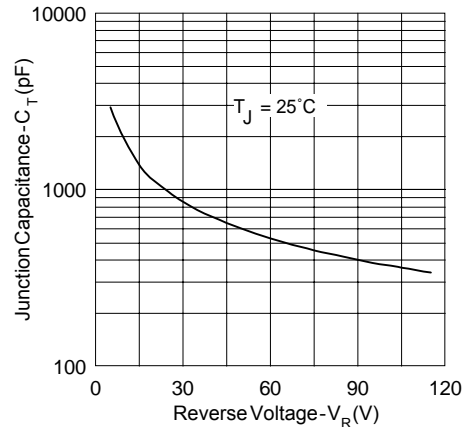


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

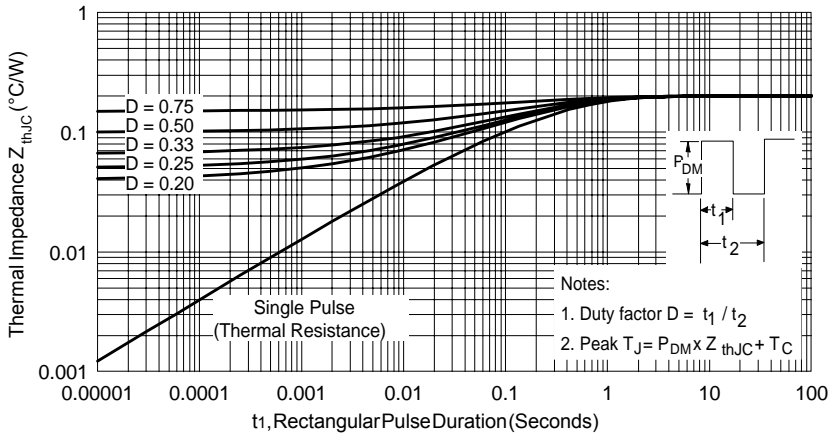


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

209CNQ... Series

Bulletin PD-20722 rev. B 07/01

International
IR Rectifier

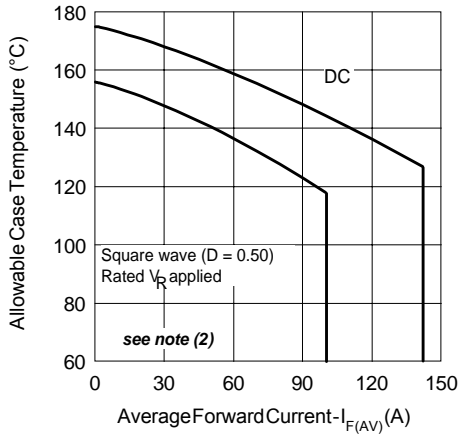


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

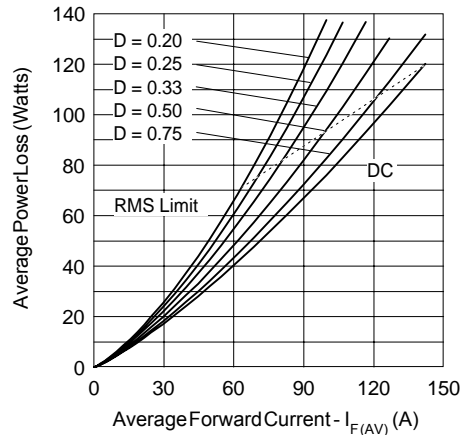


Fig. 6 - Forward Power Loss Characteristics

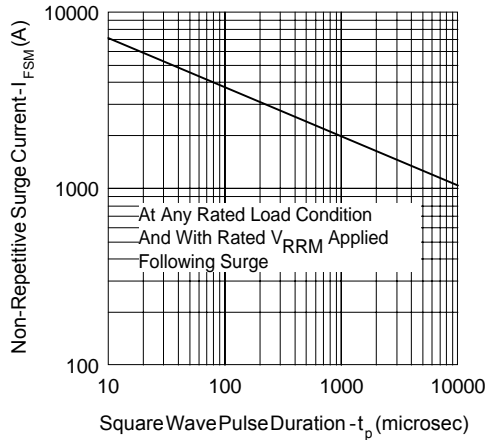


Fig. 7 - Max. Non-Repetitive Surge Current

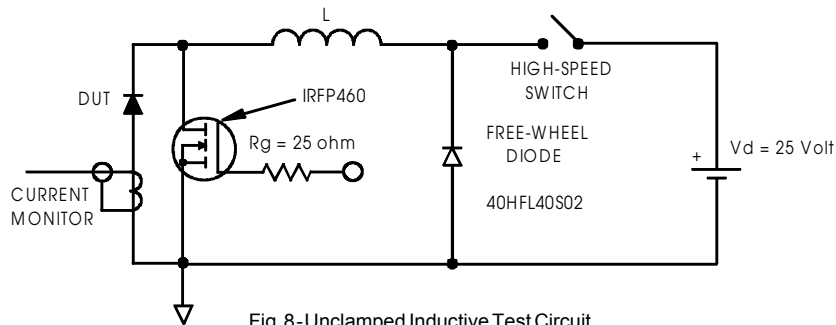


Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = \text{rated } V_R$

International
IOR Rectifier

209CNQ... Series

Bulletin PD-20722 rev. B 07/01

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 07/01