

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Vishay/BCcomponents](#)
[LSR3700Z02200KR500](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

LSR37

Vishay BCcomponents



High Voltage Surge Metal Glaze Leaded Resistor

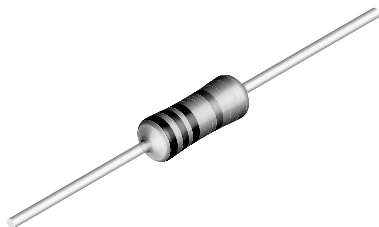

A metal glazed film is deposited on a high grade ceramic body. After that caps are applied to the rods and tinned electrolytic copper wires are welded to these end caps. The resistors are coated with a light-blue lacquer which provides electrical, mechanical and climatic protection. The encapsulation is resistant to all cleaning solvents according to IEC 60068-2-45.

FEATURES

- High pulse-loading (10 kV as specified) capability (flashes)
- Good replacement for carbon-composite resistors
- Lead (Pb)-free solder contacts
- Pure Tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compliant to RoHS directive 2002/95/EC



APPLICATIONS

- Application in overload and high voltage pulse hazard circuits (TV-sets, monitors), high power electronic ballasts

TECHNICAL SPECIFICATIONS		
DESCRIPTION	VALUE	
Resistance Range ⁽¹⁾	220 Ω to 910 Ω	1 k Ω to 10 k Ω
Resistance Tolerance and Series	$\pm 10\%$; $\pm 20\%$; E12 series	
Rated Dissipation, P_{70}	0.5 W	
Thermal Resistance, R_{th}	120 K/W	
Temperature Coefficient	0 ppm/K to + 600 ppm/K	- 600 ppm/K to + 200 ppm/K
Voltage Coefficient	0 to + 350 ppm/V	± 50 ppm/V
Maximum Permissible Voltage U_{max}	$V = \sqrt{P_n \times R}$	
Dielectric Withstanding Voltage of the Insulation for 1 Min	700 V	
Basic Specifications	IEC 60115-1	
Climatic Category (IEC 60068-1)	55/155/56	
Stability After:		
Load (1000 h, P_{70})	$\Delta R \text{ max.: } \pm (3.0\% R + 0.10 \Omega)$	
Long Term Damp Heat Test (56 Days)	$\Delta R \text{ max.: } \pm (3.0\% R + 0.10 \Omega)$	
Soldering (10 s, 260 $^{\circ}\text{C}$)	$\Delta R \text{ max.: } \pm (1.0\% R + 0.10 \Omega)$	
High Voltage Test for R-Value > 3.3 k Ω , 10 kV; 1 nF; 50 x 12/Min	$\Delta R/R \text{ max.: } \pm 20\%$ (typical value $\pm 10\%$)	
ESD Contact Discharge 12 kV; 100 Pulses	$\Delta R/R \text{ max.: } \pm 20\%$ (typical value: $\pm 10\%$)	

Note

⁽¹⁾ R values below 220 Ω are available on request



LSR37

High Voltage Surge Metal Glaze
Leaded Resistor

Vishay BCcomponents

PART NUMBER																	
PART NUMBER: LSR3700001002KA100																	
L	S	R	3	7	0	0	0	0	1	0	0	2	K	A	1	0	0
MODEL/SIZE		VARIANT			TCR/MATERIAL			VALUE			TOLERANCE		PACKAGING ⁽¹⁾		SPECIAL		
LSR3700		0 = Neutral Z = Value overflow (Special)			0 = Standard			3 digit value 1 digit multiplier MULTIPLIER 9 = *10 ⁻¹ 0 = *10 ⁰ 1 = *10 ¹ 2 = *10 ²			K = ± 10 % M = ± 20 %		A1 R5		The 2 digits are used for all special parts. 00 = Standard		
PRODUCT DESCRIPTION: LSR37 10 % A1 10K																	
LSR37		10 %			A1			10K									
MODEL/SIZE		TOLERANCE			PACKAGING ⁽¹⁾			RESISTANCE VALUE									
LSR37		± 10 % ± 20 %			A1 R5			220R = 220 Ω 1K2 = 1.2 kΩ									


Notes

⁽¹⁾ Please refer to table PACKAGING

- The PART NUMBER is shown to facilitate the introduction of a unified part numbering system for ordering products

PACKAGING					
MODEL	TAPING	AMMO PACK		REEL	
		PIECES	CODE	PIECES	CODE
LSR37	Axial, 52 mm	1000	A1	5000	R5

DIMENSIONS

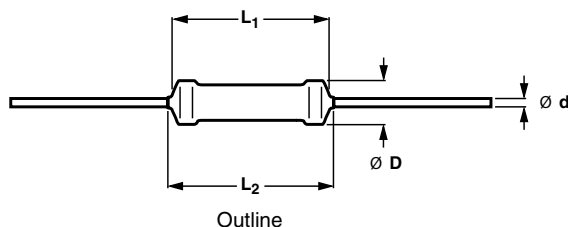

DIMENSIONS - resistor type and relevant physical dimensions				
TYPE	Ø D _{max.}	L ₁ max.	L ₂ max.	Ø d
LSR37	4.0	9.0	10.0	0.7 ± 0.03

LSR37

Vishay BCcomponents

High Voltage Surge Metal Glaze
Leaded Resistor


MASS PER UNIT	
TYPE	MASS (mg)
LSR37	457

MARKING

The nominal resistance and tolerance are marked on the resistor using colored bands in accordance with IEC 60062, marking codes for resistors and capacitors.

Three bands are used for 20 % tolerance with no indication for the tolerance. Four bands are used for 10 % tolerance.

Grey is used instead of silver for 10 % because metal particles in the lacquer could affect high-voltage properties.

OUTLINES

The length of the body (L_1) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation (IEC 60294).

FUNCTIONAL PERFORMANCE

PRODUCT CHARACTERIZATION

Standard values of rated resistance (nominal resistance) are taken from the E12 series with a tolerance of 10 % or 20 %. The values of the E12 series are in accordance with IEC 60063.

The limiting voltage DC is not applicable, because the maximum rated voltage for the maximum R_n -value of 10 k Ω at $P_n = 0.5$ W is only 70.7 V.

LIMITING VALUES		
TYPE	MAXIMUM PERMISSIBLE VOLTAGE $U_{max.}^{(1)}$ (V)	RATED DISSIPATION, P_{70} (W)
LSR37	$V = \sqrt{P_n \times R}$	0.5

Notes

⁽¹⁾ The maximum voltage that may be continuously applied to the resistor element, see IEC 60115-1


- The maximum permissible hot-spot temperature is 155 °C



LSR37

High Voltage Surge Metal Glaze Leaded Resistor


Vishay BCcomponents

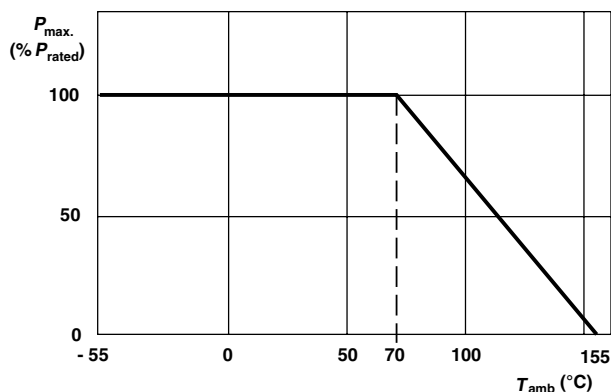

The power that the resistor can dissipate depends on the operating temperature.

Maximum dissipation ($P_{max.}$) in percentage of rated power as a function of the ambient temperature (T_{amb}).


Derating

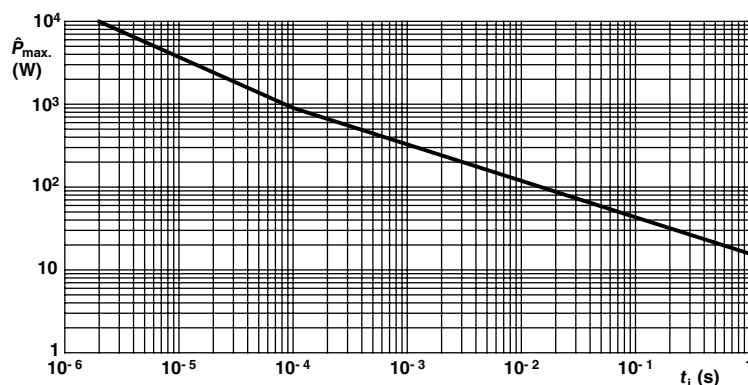


Pulse on a regular basis; maximum permissible peak pulse power $\hat{P}_{max.}$ as a function of pulse duration (t_i) for single pulse condition

Pulse Loading Capability

The resistors with straight leads are suitable for processing on automatic insertion equipment and cutting and bending machines. the minimum pitch for this type is 6e (15 mm). For temperature rise at soldering place see figures below.

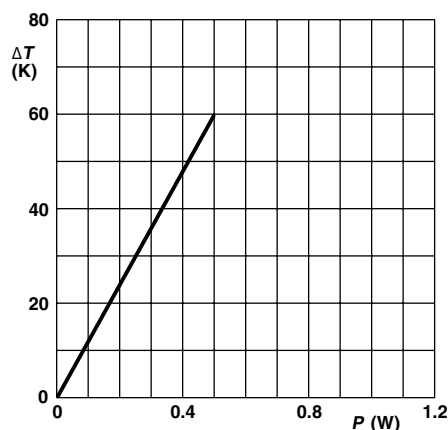

Hot-spot temperature rise (ΔT) as a function of dissipated power

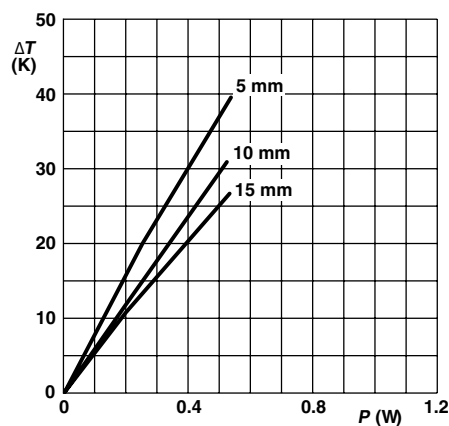

Temperature rise (ΔT) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting

Application Information

LSR37

Vishay BCcomponents

High Voltage Surge Metal Glaze
 Leaded Resistor



TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with the IEC 60115-1 specifications, category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days).

The tests are carried out in accordance with IEC 60068-2-xx test method under standard atmospheric conditions according to IEC 60068-1, 5.3.

In the Test Procedures and Requirements table the tests and requirements are listed with reference to the relevant clauses of IEC 60115-1 and IEC 60068-2-xx test methods. A short description of the test procedure is also given. In some instances deviations from the IEC recommendations were necessary for our method of specifying.

All soldering tests are performed with mildly activated flux.

TEST PROCEDURES AND REQUIREMENTS				
IEC 60115-1 CLAUSE	IEC 60068-2-xx TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.16	21 (U)	Robustness of terminations:		
4.16.2	21 (Ua1)	Tensile all samples	Ø 0.7 mm; load 10 N; 10 s	Number of failures < 10×10^{-6}
4.16.3	21 (Ub)	Bending half number of samples	Ø 0.7 mm; load 5 N; 4 x 90°	Number of failures < 10×10^{-6}
4.16.4	21 (Uc)	Torsion other half of samples	3 x 360° in opposite directions	No damage $\Delta R \text{ max.: } \pm (1.0 \% R + 0.10 \Omega)$
4.17	20 (Ta)	Solderability	2 s; 235 °C: Solder bath method; SnPb40 3 s; 245 °C: Solder bath method; SnAg3Cu0.5	Good tinning; no damage
4.18	20 (Tb)	Resistance to soldering heat	Thermal shock: 10 s; 260 °C; 3 mm from body	$\Delta R \text{ max.: } \pm (1.0 \% R + 0.10 \Omega)$
4.19	14 (Na)	Rapid change of temperature	30 min at - 55 °C and 30 min at + 155 °C; 5 cycles	$\Delta R \text{ max.: } \pm (1.0 \% R + 0.10 \Omega)$
4.20	29 (Eb)	Bump	3 x 1500 bumps in 3 directions; 40 g	No damage $\Delta R \text{ max.: } \pm (1.0 \% R + 0.10 \Omega)$
4.22	6 (Fc)	Vibration	Frequency 10 Hz to 500 Hz; displacement 1.5 mm or acceleration 10 g; 3 directions; total 6 h (3 x 2 h)	No damage $\Delta R \text{ max.: } \pm (1.0 \% R + 0.10 \Omega)$
4.23		Climatic sequence:		
4.23.2	2 (Ba)	Dry heat	16 h; 155 °C	$R_{\text{ins min.: } 10^3 \text{ M}\Omega}$ $\Delta R \text{ max.: } \pm (3.0 \% R + 0.10 \Omega)$
4.23.3	30 (Db)	Damp heat (accelerated) 1st cycle	24 h; 55 °C; 90 % to 100 % RH	
4.23.4	1 (Aa)	Cold	2 h; - 55 °C	
4.23.5	13 (M)	Low air pressure	2 h; 8.5 kPa; 15 °C to 35 °C	
4.23.6	30 (Db)	Damp heat (accelerated) remaining cycles	5 days; 55 °C; 95 % to 100 % RH	
4.24.2	78 (Cab)	Damp heat (steady state)	56 days; 40 °C; 90 % to 95 % RH; dissipation 0.01 P_{70} ; limiting voltage $U_{\text{max.}}$ 100 V_{DC}	$\Delta R \text{ max.: } \pm (3.0 \% R + 0.10 \Omega)$
4.25.1		Endurance	1000 h at 70 °C; P_{70} or $U_{\text{max.}}$	$\Delta R \text{ max.: } \pm (3.0 \% R + 0.10 \Omega)$
4.8		Temperature coefficient	220 Ω to 910 Ω 1 k Ω to 10 k Ω	0 to + 600 ppm/K - 600 to + 200 ppm/K
4.7		Voltage proof on insulation	U_{RMS} = 700 V during 1 min; V-block method	No breakdown
4.6.1.1		Insulation resistance	U = 500 V_{DC} during 1 min; V-block method	$R_{\text{ins min.: } 10^4 \text{ M}\Omega}$



LSR37

High Voltage Surge Metal Glaze
Leaded Resistor

Vishay BCcomponents

TEST PROCEDURES AND REQUIREMENTS

IEC 60115-1 CLAUSE	IEC 60068-2-xx TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.13		Short time overload	Room temperature; dissipation $6.25 \times P_{70}$; 10 cycles; 5 s ON and 45 s OFF	ΔR max.: $\pm (2.5 \% R + 0.10 \Omega)$
		High voltage pulse 10 kV; 1 nF; 50 x 12/min	For $R_n > 3.3 \text{ k}\Omega$	$\Delta R/R$ max.: $\pm 20 \%$ (typical value $\pm 10 \%$)
		12 kV ESD test; 100 pulses	ESD contact discharge	$\Delta R/R$ max.: $\pm 20 \%$ (typical value: $\pm 10 \%$)
4.26		Active flammability "cheese-cloth test"	Steps of: 5/10/16/25/40 x P_{70} duration 5 min	No flaming of gauze cylinder
4.35		Passive flammability "needle-flame test"	Application of test flame for 20 s	No ignition of product no ignition of under-layer burning time less than 30 s

12NC INFORMATION FOR HISTORICAL CODING REFERENCE

- The resistors have a 12-digit numeric code starting with 2322 245
- The subsequent 2 digits indicate the resistor type and packing
- The remaining digits indicate the resistance value:
 - The first 2 digits indicate the resistance value
 - The last digit indicates the resistance decade

Last Digit of 12NC Indicating Resistance Decade

RESISTANCE DECADE	LAST DIGIT
47 Ω to 82 Ω	9
100 Ω to 820 Ω	1
1 k Ω to 9.1 k Ω	2
10 k Ω	3

12NC Example

The 12NC for a LSR37, resistor value 1.5 k Ω , 10 % tolerance, supplied on a bandolier of 1000 units in ammpack, is: 2322 245 12152.

12NC - Resistor type and packaging

TYPE	TOLERANCE (%)	2322 245	
		1000 UNITS IN AMMOPACK	5000 UNITS ON REEL
LSR37	± 10	12...	22...
	± 20	11...	21...



Legal Disclaimer Notice

Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.