

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies](#)
[AVE350B-48S28-6](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

POWER

AVE350B Series

350 Watts

Data Sheet

Total Power: 350 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 Wide input range
- Extra wide trim range
16.8 V - 33 V for 28 Vo
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super high efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium substrate design

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



Electrical Specifications

Input	
Input range:	36 - 75 VDC
Efficiency ² :	93.5%
Output	
Voltage tolerance:	+/-1%
Line regulation:	+/-1%
Load regulation:	+/-1%
Noise/ripple:	200mV
Over voltage protection:	Latch off
Over temperature protection:	Auto-restart
Switching frequency:	285 KHz
Temperature coefficient:	±0.02/°C
Isolation	
I/O isolation:	1500 VDC min.

Environmental Specifications

Operating ambient temperature range:	-40 °C to +85 °C
Storage temperature:	-55 °C to +125 °C
Humidity:	5% to 95% (non-condensing)
MTBF:	2 Million hours
RoHS Compliant	


AVE350B Series Data Sheet

Ordering Information

Model number	Input voltage	Output voltage	Power
AVE350B-48S28-6	36 - 75 V _{in}	28 V @ 12.5 A	350 W
AVE350B-48S28P-6	36 - 75 V _{in}	28 V @ 12.5 A	350 W

- Standard version is negative enable
- "-6" = 3.8mm pin length
- "-P" = Positive enable

Mechanical Drawings

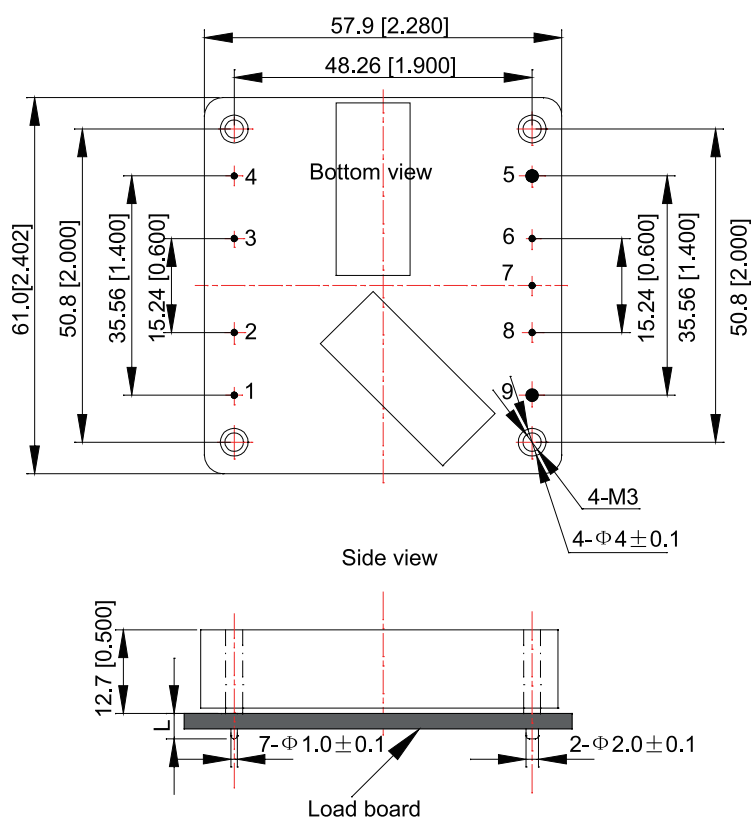

Unit: mm[inch]

Bottom view: pin on upside

Tolerance: X.Xmm ± 0.5mm [X.X in. ± 0.02in.]

X.XXmm ± 0.25mm [X.XX in. ± 0.01in.]

Base plate

AVE350B Series Data Sheet

Pin Length Option

Device code suffix	L
-4	4.8mm ± 0.5mm
-6	3.8mm ± 0.5mm
-8	2.8mm ± 0.5mm
None	5.8mm ± 0.5mm

Pin Designations

Pin No.	Name	Function
1	V_{in+}	Positive input terminal
2	Remote ON/OFF	ON/OFF control terminal
3	Case	Pin connected to baseplate
4	V_{in-}	Negative input terminal
5	V_{o-}	Negative output terminal
6	Sense-	Negative remote sense
7	Trim	Output voltage trim
8	Sense+	Positive remote sense
9	V_{o+}	Positive output terminal

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com

AVE350B DS Rev. 07.24.14