



## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[CNC Tech](#)  
[3130-06-0102-99](#)



For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

REV.	DESCRIPTION	DATE
A	RELEASE	2012.11.12



NOTES:  
Insulator Material: PBT, UL 94V-0  
Contact Plating: Nickel 50µf  
Contact Material: Brass

Current Rating : 1A AC,DC  
Contact Resistance: 20MΩ Max.  
Dielectric Withstanding: AC 500V  
Insulator Resistance: 1000MΩ Min.  
Operating Temp.: -40°C~+105°C

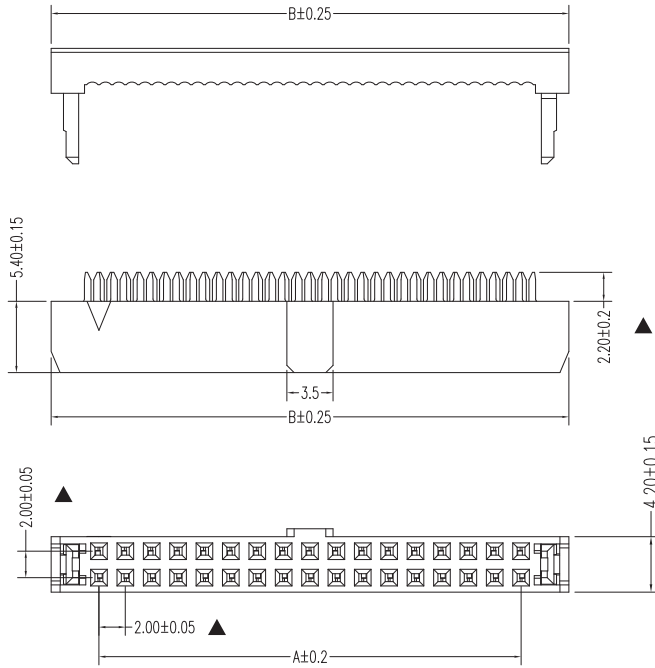

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	4.0	11.2
08	6.0	13.2
10	8.0	15.2
12	10.0	17.2
14	12.0	19.2
16	14.0	21.2
18	16.0	23.2
20	18.0	25.2
22	20.0	27.2
24	22.0	29.2
26	24.0	31.2
28	26.0	33.2
30	28.0	35.2
34	32.0	39.2
36	34.0	41.2
40	38.0	45.2
44	42.0	49.2
50	48.0	55.2

Mating Part Number		
3120-ALL	3110-XX-001-11-XX	3110-XX-001-12-XX
3110-XX-002-12-XX	3110-XX-003-12-XX	

UNLESS TOLERANCE		DRAW BY
GENERAL	ANGLE	DESIGN BY
X. ± 0.30	X.* ± 3.0°	CHECK BY
.X ± 0.20	.X* ± 2.0°	APPROVE BY
.XX ± 0.15	.XX* ± 1.0°	SCALE
.XXX ± 0.10	.XXX* ± 0.5°	SHEET
		UNIT
		1:1
		1/1
		MM

**CnC Tech, LLC**

Part NO. 3130-XX-0102-99

DRW NO: REV: A