



Distributor of Panduit: Excellent Integrated System Limited

Datasheet of MLT4H-TL316 - TIE S-LOCK 304 SS 250# 4X14.3"

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[MLT4H-TL316](#)


For any questions, you can email us directly:

sales@integrated-circuit.com



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" ±.3 [7]
MLT2H-LP316	50	2" [51]	7.9" [201]
MLT2.7H-LP316	50	2.7" [69]	10.2" [259]
MLT4H-LP316	50	4" [102]	14.3" [362]
MLT6H-LP316	50	6" [152]	20.5" [521]
MLT8H-LP316	50	8" [203]	26.8" [679]
MLT10H-LP316	50	10" [254]	33.0" [838]
MLT2H-TL316	250	2" [51]	7.9" [201]
MLT4H-TL316	250	4" [102]	14.3" [362]

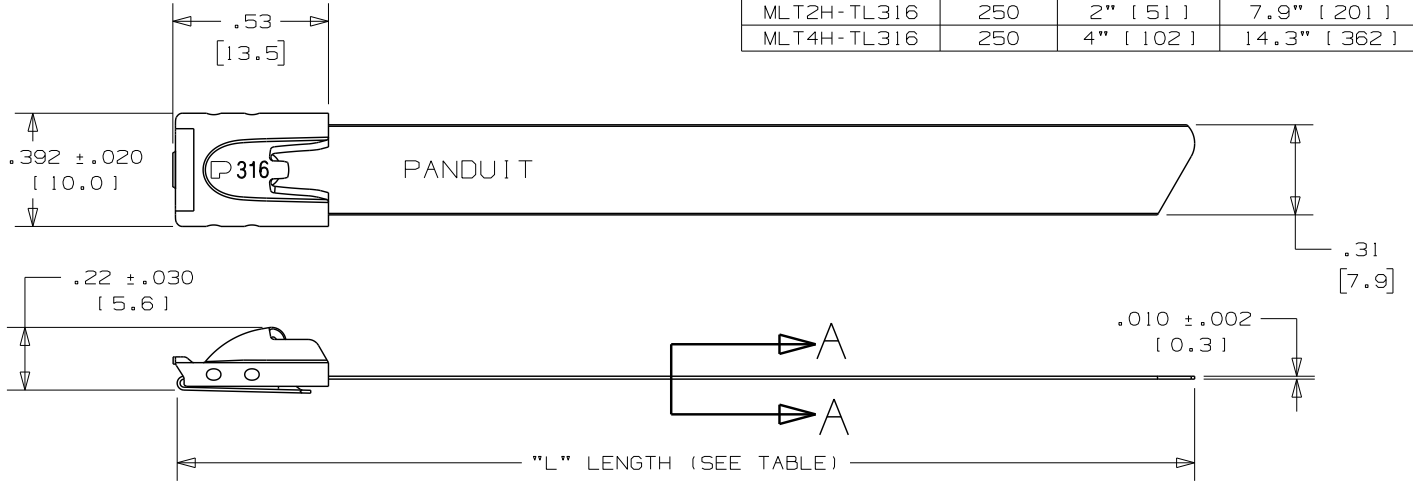

- NOTES:
1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,ST3MT,HTMT
 2. MINIMUM LOOP TENSILE STRENGTH - 450 LBS (2000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.020 [.5]
 .X = ±.030 [.8] ANGLES = ±2°
 5. MATERIAL: 316 STAINLESS STEEL

FULLY ROUNDED EDGES ALONG STRAP BODY
 SECTION A - A
 SCALE 6:1

				PANDUIT CORP. TINLEY PARK, ILLINOIS				
				METAL LOCKING TIE HEAVY SERIES - 316 STAINLESS STEEL - CUSTOMER DRAWING -				
06A	2/12	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY				
REV	DATE	BY	CHK	DESCRIPTION	DRAWN BY	CHK'D	SCALE	DRAWING NO.
					JAMB	DPN	2x	N41116BS_DC