

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Visual Communications Company, LLC](#)

[VAOB-3GADE2-C](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

BI-COLOR LED LAMP

VAOB-3GADE2-C

Feature

- Low Power Consumption
- High Intensity
- I.C. compatible


Applications

- Commercial Outdoor Sign Board
- Front Panel Indicator
- Backlight

Description

- The (1)Red and (2)Green Chips are Matched For uniform Light Output
- Diffusion Lens

Package Dimension

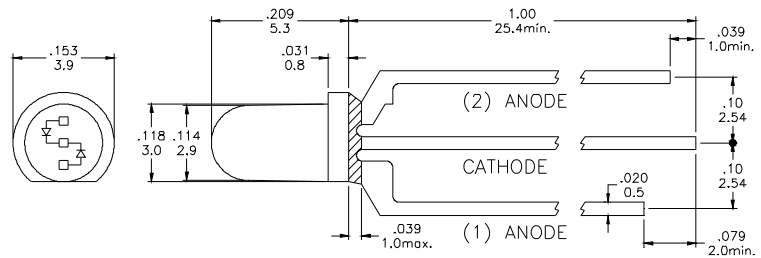

* Tolerance: $\frac{0.01}{0.25}$ Unit: $\frac{\text{inch}}{\text{mm}}$

Absolute Maximum Ratings at Ta=25°C

| Symbol | Parameter | Max. | Unit |
|--------|---------------------------------------|---------------|---------|
| PD | Power Dissipation | 100 | mW |
| VR | Reverse Voltage | 5 | V |
| IAF | Average Forward Current | 30 | mA |
| IPF | Peak Forward Current (Duty=0.1, 1kHz) | 100 | mA |
| — | Derating Linear Form 25°C | 0.4 | mA / °C |
| Topr | Operating Temperature Range | - 40 to + 80 | °C |
| Tstg | Storage Temperature Range | - 40 to + 100 | °C |

Lead Soldering Temperature [1.6mm (0.063inch) From Body] 260°C For 5 Seconds.

Electrical / Optical Characteristics and Curves at Ta=25°C

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|--------|---------------------|----------------|------|------|------|------|
| VF | Forward Voltage | IF = 20 mA | R | 1.85 | 2.5 | V |
| | | | G | 2.2 | 2.8 | |
| IR | Reverse Current | VR = 5 V | | | 50 | μA |
| IV | Luminous Intensity | IF = 20 mA | R | 100 | | mcd. |
| | | | G | 80 | | |
| λD | Dominant Wavelength | IF = 20 mA | R | 640 | | nm |
| | | | G | 570 | | |

Specific binning requirements- please contact our home office