

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)



[LCAX250-58-X](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

|  |  |
|--|--|
| Material                                       | High Conductivity Seamless Copper Tube   |
| Plating  | Electro-Tin  |
| Wire Size                                      | 250 STR/FLEX   |
| Wire Type                                      | Stranded Copper:<br>Class G, H, I, K, M,<br>Locomotive   |
| Wire Strip Length                              | 1-1/16 in.   |
| Stud Size                                      | 5/8 in.  |
| UL Listed Wire Connector                       | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating                          | 90 ° C   |
| C.S.A Certified Wire Connector                 | Yes  |
| Panduit Color Code on Barrel                   | YELLOW   |
| Panduit Die Index No. on Barrel                | P62  |
| Alternate Industry Die Index No. ( ) on Barrel | (16)   |

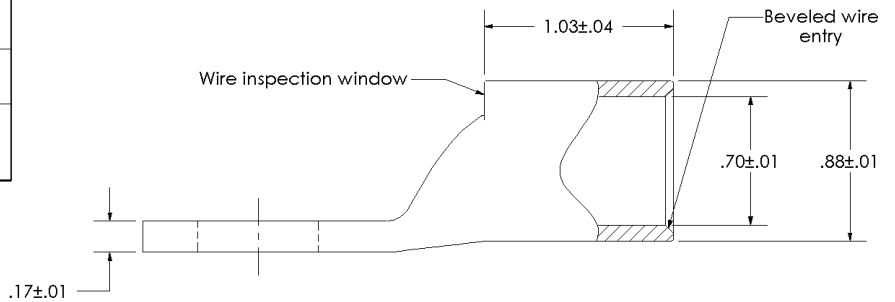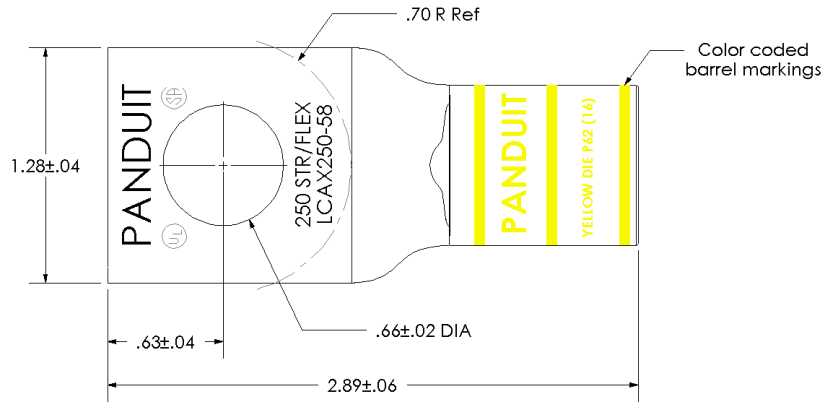

|     |      |     |     |   |                 |
|-----|------|-----|-----|---|-----------------|
|     |      |     |     | <b>PANDUIT CORP. TINLEY PARK, ILLINOIS</b>                  |                 |
|     |      |     |     | LCAX250-58-X<br>Copper Lug - One-Hole, Standard Flex Barrel |                 |
| 00  | 6/03 | CJW | SAC | RELEASED  | 10850           |
| REV | DATE | BY  | CHK | DESCRIPTION   | ECN             |
|     |      |     |     |   | SCALE N/A       |
|     |      |     |     | DRAWING NO / CAD FILE                                       | LCAX250-58-CUST |