

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)

[LCCX650-12-6](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	650 STR/FLEX
Wire Type	Stranded Copper: Locomotive
Wire Strip Length	3.0 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90 ° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P 106
Alternate Industry Die Index No. () on Barrel	(24)



CERTIFIED LISTED Wire Connector

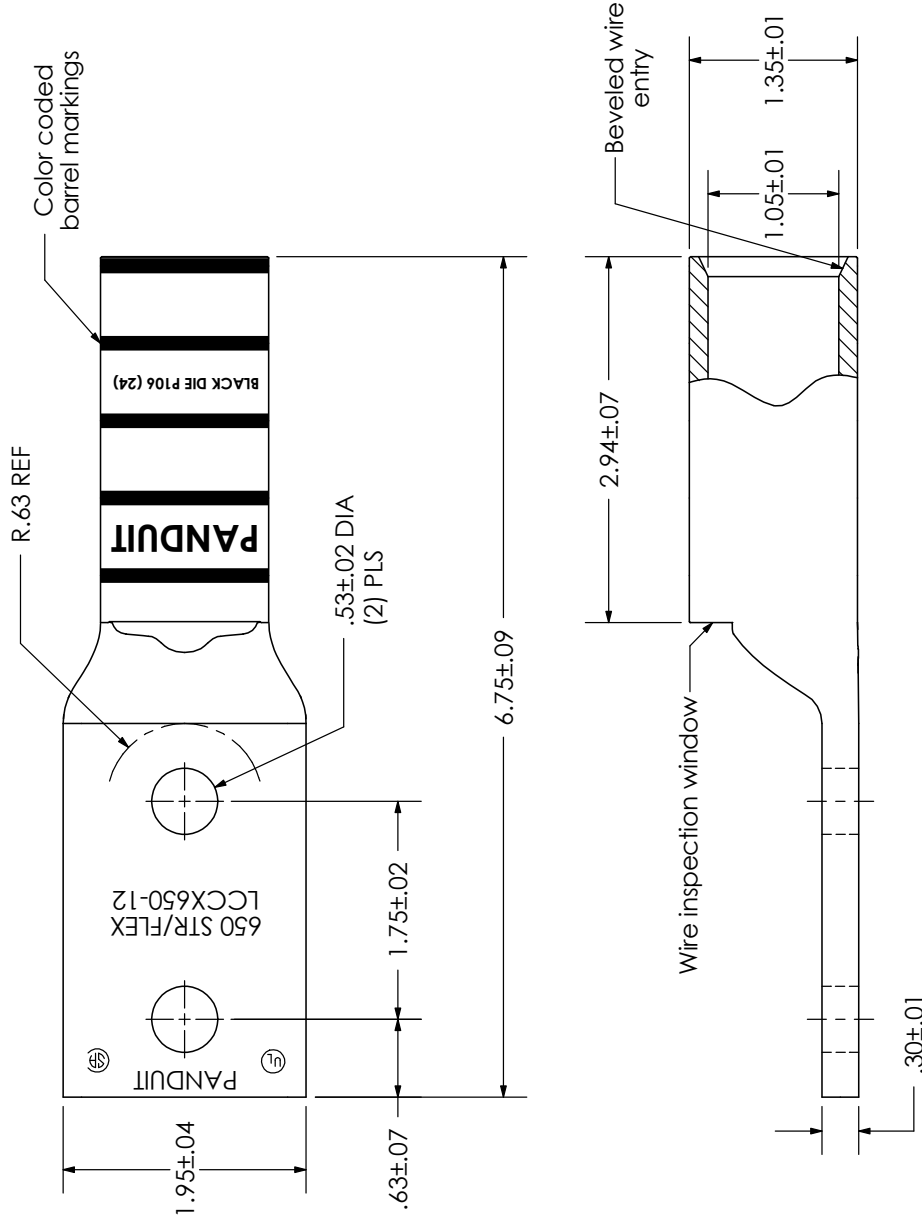

		LCCX650-12-6	
		Copper Lug - Two-Hole, Long Flex Barrel with Window	
REV	DATE	BY	CHK
01	4/10	JHNU	JHNU
DESCRIPTION			REVISED DESCRIPTION TO LONG FLEX BARREL
SCALE		N/A	
DRAWING NO / CAD FILE		LCCX650-12-CUST	