

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)
[RGREJ1096Y](#)



For any questions, you can email us directly:
sales@integrated-circuit.com

- A. System Overview
- B. Copper Systems
- C. Fiber Optic Systems
- D. Power over Ethernet
- E. Zone Cabling
- F. Wireless
- G. Outlets
- H. Media Distribution
- I. Physical Infrastructure Management
- J. Overhead & Underfloor Routing
- K. Surface Raceway
- L. Cabinets, Racks & Cable Management
- M. Grounding & Bonding
- N. Industrial
- O. Labeling & Identification
- P. Cable Management Accessories
- Q. Index




Retrofit Rack Grounding Kits

- Provide a dedicated ground system to maintain system performance and protect network equipment when equipment is already installed
- Provide a complete system of matched components that can be easily selected to save cost and labor
- Optimized for installation on 19" racks that meet EIA-310-D, with functioning equipment, and are deployed in the field
- Thread-forming screws eliminate the need to manually remove paint from the rack
- Engineered to comply with US and International grounding requirements

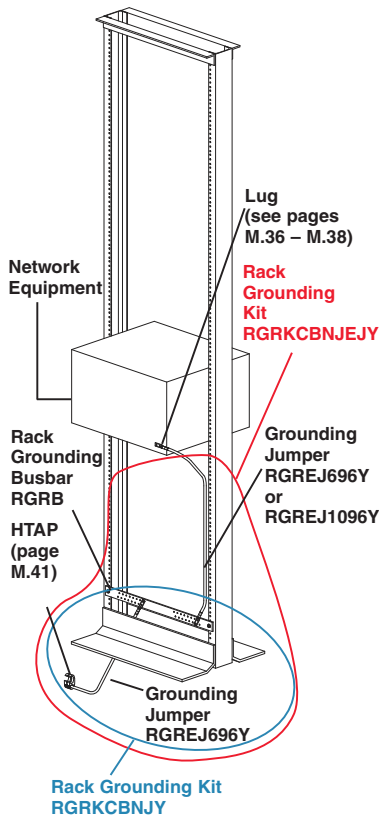

RGRKCBNJEJY



RGRKCBNJEJY

Part Number	Part Description	Std. Pkg. Qty.
Busbar and Jumper Kits		
RGRKCBNJEJY	Rack grounding kit to ground the rack and one piece of equipment; includes one RGRB19U busbar, one HTCT250-2-1 HTAP, and two RGREJ696Y grounding jumpers.	1
RGRKCBNJEJY	Rack grounding kit to ground the rack; includes one RGRB19U busbar, one HTCT250-2-1 HTAP, and one RGREJ696Y grounding jumper.	1

Busbar Kits		
RGRB19Y	Grounding busbar; 19" (483mm) length; tin-plated; fourteen holes arranged for flexibility in mounting; provided with two each #12-24 x 1/2" and M6 x 12mm thread-forming screws.	1
RGRB19U	Grounding busbar; 19" (483mm) length; tin-plated; twenty holes arranged for flexibility in mounting with twenty #12-24 x 1/2" hex head screws installed; mounting hole sets have 5/8" (15.9mm) spacing; provided with two each #12-24 x 1/2", M6 x 12mm thread-forming screws, and two #12 flat washers for mounting.	1
RGRB19CN	Grounding busbar; 19" (483mm) length; tin-plated; twenty holes arranged for flexibility in mounting with twenty #12-24 x 1/2" hex head screws installed; mounting hole sets have 5/8" (15.9mm) spacing; provided with two bonding cage nuts and four #12-24 bonding screws.	1

Equipment Jumper Kits		
RGREJ696Y	Grounding jumper; #6 AWG (16mm ²); 96" (2.44m) length; one end factory terminated to lug; provided with .16 oz. (5cc) of antioxidant and two each #12-24 x 1/2", M6 x 12mm, #10-32 x 1/2" and M5 x 12mm thread-forming screws.	1
RGREJ1096Y	Grounding jumper; #10 AWG (6mm ²); 96" (2.44m) length; one end factory terminated to lug; provided with .16 oz. (5cc) of antioxidant and two each #12-24 x 1/2", M6 x 12mm, #10-32 x 1/2" and M5 x 12mm thread-forming screws.	1