

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1783660000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

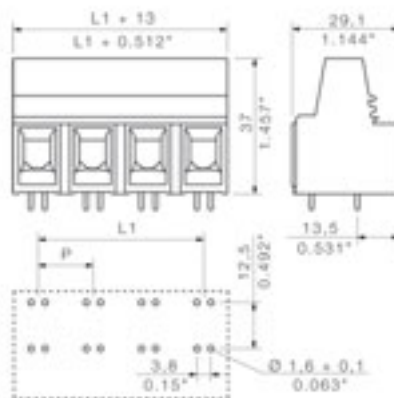

#### General ordering data

Order No.	1783660000
Part designation	LX 15.00/1/90 GR
Version	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 1, 90°, Box
EAN	4032248184910
Qty.	20 pc(s).

#### System parameters

Product family	System LX
Conductor connection system	Clamping yoke connection
Fitted to PCB	Soldered connection
Outgoing direction of conductor	90°
Pitch	15 mm
Pitch in inch	0.591 inch
No. of poles	1
Fitted by customer	no
Max. adjacent poles per row	10
No. of rows	1
Solder pin length	4.5 mm
Dia. of fitting hole	1.6 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	2

**System parameters**

Screwdriver blade	1.0 x 5.5
Screwdriver blade standard	DIN 5264
Tightening torque, min.	2 Nm
Tightening torque, max.	4 Nm
Clamping screw	M 5
Stripping length	16 mm
L1 in mm	0 mm
L1 in inch	0 inch
Electric shock protection to DIN VDE 0470	IP 10
Electric shock protection to DIN VDE 0470	Safe from finger touch

**Material data**

Insulating material	Wemid (PA)
Colour	pebble grey
colour chart	Similar to RAL 7032
Insulating material group	I
Flammability class UL 94	V-1
CTI	>= 601
Temperature of glow-wire test	960 °C
Duration of glow-wire test	30 S
Contact base material	E-Cu
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C

**Connectable conductors**

Clamping range, min.	1.31 mm <sup>2</sup>
Clamping range, max.	25 mm <sup>2</sup>
AWG, min.	16
AWG, max.	4
Solid, min. H05(07) V-U	1.5 mm <sup>2</sup>
Solid, max. H05(07) V-U	16 mm <sup>2</sup>
Stranded, min. H07V-R	6 mm <sup>2</sup>
Stranded, max. H07V-R	25 mm <sup>2</sup>
Flexible, min. H05(07) V-K	1.5 mm <sup>2</sup>
Flexible, max. H05(07) V-K	25 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	16 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	16 mm <sup>2</sup>
Gauge to EN 60999 a x b; ø	6.9 mm x 6.9 mm

**DIN IEC rating data**

Rated current, min. No. pins (Tu=20°C)	101 A
Rated current, max. No. pins (Tu=20°C)	101 A
Rated current, min. No. pins (Tu=40°C)	101 A
Rated current, max. No. pins (Tu=40°C)	101 A
Rated voltage for overvoltage class/pollution severity II/2	1,000 V
Rated voltage for overvoltage class/pollution severity III/2	1,000 V

#### DIN IEC rating data

Rated voltage for overvoltage class/pollution severity III/3	1,000 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	6 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	8 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	8 kV
Short-time withstand current resistance	3 x 1s mit 1000 A

#### CSA rating data

Rated current (Use group C)	85 A
Rated voltage (Use group C)	600 V
Rated voltage (Use group D)	600 V
Rated current (Use group D)	5 A
AWG conductor (field wiring), min.	16
AWG conductor (field wiring), max.	4

#### UL 1059 rating data

Rated voltage (Use group C)	600 V
Rated current (Use group C)	85 A
Rated voltage (Use group D)	600 V
Rated current (Use group D)	5 A
AWG conductor, min.	16
AWG conductor, max.	4

#### Approvals

Approvals institutes



#### Downloads

CAD Library (P-CAD Format - Standard)	LX.lib
---------------------------------------	--------

#### Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

#### Similar products

Order No.	Part designation	Version
1783670000	LX 15.00/2/90 GR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 2, 90°, Box
1783680000	LX 15.00/3/90 GR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 3, 90°, Box
1783760000	LX 15.00/3/90 GN	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 3, 90°, Box
1783690000	LX 15.00/4/90 GR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 4, 90°, Box
1806460000	LX 15.00/5/90 GR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 5, 90°, Box
1809870000	LX 15.00/6/90 GR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 6, 90°, Box
1809880000	LX 15.00/8/90 GR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 25 mm <sup>2</sup> , Pitch: 15.00 mm, No. of poles: 8, 90°, Box