

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Würth Electronics Midcom](#)
[750341637](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

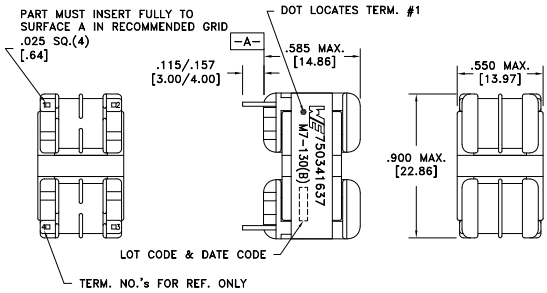

Ⓒ ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	1.350 ohms max.
D.C. RESISTANCE	4-3 @20°C	1.350 ohms max.
INDUCTANCE	1-2 10kHz, 50mVAC, Ls	25.0mH +60%/-30%
INDUCTANCE	4-3 10kHz, 50mVAC, Ls	25.0mH +60%/-30%
SATURATION CURRENT	1-4 tie(2+3), roll off 20% from initial	2.0A
LEAKAGE INDUCTANCE	1-4 tie(2+3), 10kHz, 50mVAC, Ls	650uH min.
DIELECTRIC	1-CORE tie(1+4), 1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO	(1-2):(4-3)	1:1, ±2%



GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to meet UL Recognized Insulation System M7-130(B), E106391.

Current Rating: 0.65A

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	<p>CONVENTIONAL PLACEMENT</p>	<p>Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]</p> <p>This drawing is dual dimensioned. Dimensions in brackets are in millimeters.</p>	<p>DRAWING TITLE</p> <p>CMC</p> <p>eiSos p/n: 750341637</p>	<p>PART NO.</p> <p>750341637</p>
6C	10/13	Method: Tray				
6B	6/13	PKG-0822				
6A	5/13	www.we-online.com/midcom				
SEE REVISION SHEET FOR REVISION LEVEL			<p>compliant RoHS SPECIFICATION SHEET 1 OF 1</p>			