

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)


[CA01COME20-7PB03](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

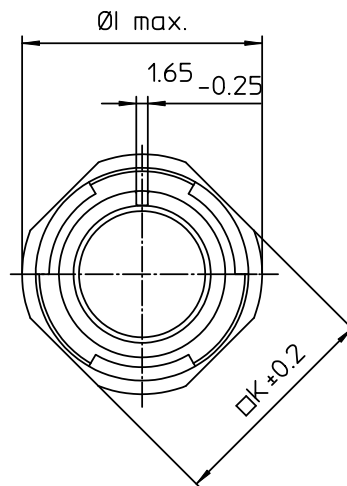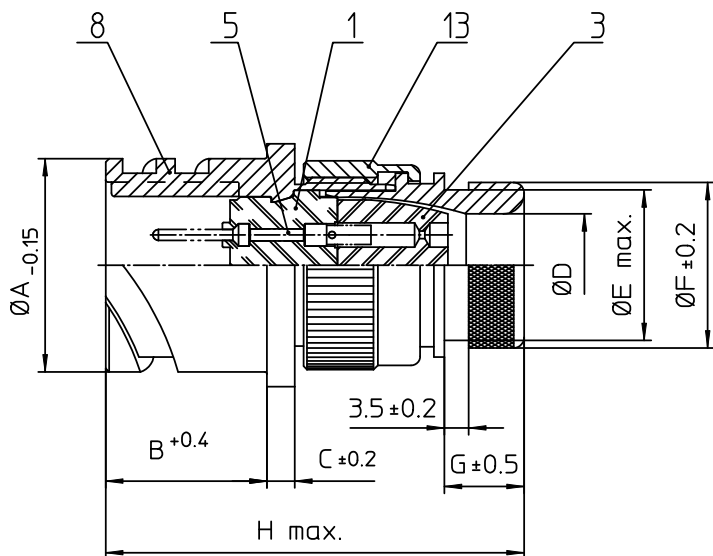

NO.	MASSE / DIMENSION
A	34,2
B	23,05
C	4
D	18,7
E	26,2
F	29,6
G	12,7
H	64
I	37,8
K	34,9



NO.	BESCHREIBUNG / DESCRIPTION
1	ISOLIERKÖRPER STIFT / INSULATOR PIN
3	DICHTKÖRPER / GROMMET
5	KONTAKTSTIFT/ CONTACT PIN
8	DOSENGEHÄUSE / SHELL
13	ENDGEHÄUSE DN / ENDBELL HEATSHRINK

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:	
Shell Material:	Aluminium alloy
Shell Plating:	Nickel plated
Insulator Material:	CR-Elastomere
Contact Material:	Copper alloy
Contact Plating:	Hard silver

all dimensions are in mm

Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for

CUSTOMER



ITT

Engineered for life
ITT CANNON GmbH
D-71334 Weinstadt/Germany

description CA01COM-E20-7P-B-03
Cable connecting plug
Endbell for heatshrink boots
Metric Crimp / Pin / Layout: 20-7

© All rights reserved. Reproduction or issue in any form
whatever is only permitted with written authorization of ITT Cannon

page 1/1
revision 484 3. Jul 16