

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Ametherm](#)

[MS15 15004](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)




**DATA SHEET**

Part Number: MS15 15004

**Ordering Different Lead Types:**

Inside Kinked Leads	Use <b>-A</b> after Ametherm's part #
Outside Kinked Leads	Use <b>-B</b> after Ametherm's part #

For example: to order an inside kinked lead use part number MS15 15004-A

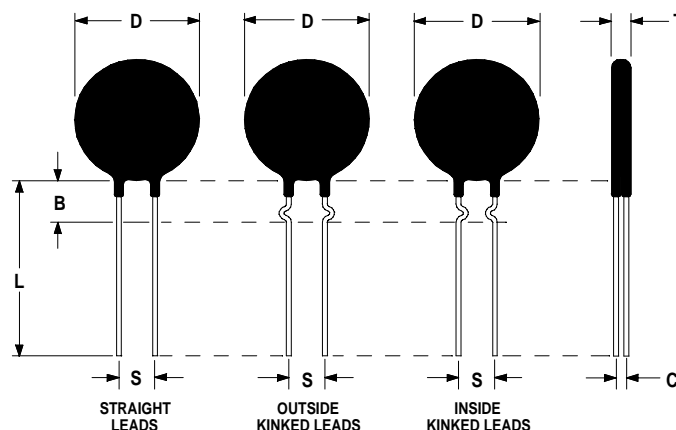

**Electrical Specifications:**

Resistance @ 25°C	15.0 Ω ± 25%
Max Steady State Current Up to 65°C	4.5A
Max Recommended Energy Rating (Joules)	155.0 J
Actual Failure Point of Instantaneous Energy (Joules)	310.0 J
Resistance @ 100% of Max Current	0.200 Ω
Resistance @ 50% of Max Current	0.850 Ω
Body Temperature @ 100% Current Rating	144 °C
Dissipation Constant	49.4mW/°C
Thermal Time Constant	114 seconds
Material Type	"G"
Max Recommended Capacitance @120/240/440VAC	10500µF/2600µF/ 800µF

**Mechanical Specifications:**

D	15.0 ± 1.0 mm
T	7.0 ± 0.7 mm
Lead Diameter	1.0 ± 0.1 mm
S	7.8 ± 2.0 mm
L	38.0 ± 9.0 mm
Straight Leads Coating Run Down	5.0 ± 1.0 mm
B	6.30 ± 0.60 mm
C	6.50 ± 0.60 mm

Revision Date: March 19, 2003

**Ametherm, Inc.** 3111 N. Deer Run Road #4 Carson City, NV 89701  
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

[www.ametherm.com](http://www.ametherm.com)