

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amulet Technologies LLC](#)
[EVK-HX-HDA570ST-VH](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

HANTRONIX

HDA570ST-VH Evaluation Kit


** Module Assemble Instructions **

Part List

Item	Amulet Part Number	Qty	Description
1	3036-0007-01HT	1	CBC-2 5.7" EVAL PCB
2	0904-0375	4	Spacer, Nylon, .375 OD
3	0900-0004-58	4	Screw, #4 x5/8", Pan Head
4	2002-0033-02	1	33-pin Display Cable
5	0310-0005-01	1	5V 1000mA Power Adapter
6	0300-0105	1	Cable, USB Mini
7	7010-0001	1	Stylus
8	0360-0008	1	GEM Quick Start Guide
9	UHT-CS2	1	CD
10	0309BR-B1K	1	Sale Brochure HMI Solutions
11	0309CC-B1K	1	Sale Brochure Color Chip


Assembly Instructions

1. Connect one end of the 33-pin display cable 2002-0033-02 into the connector of the display.

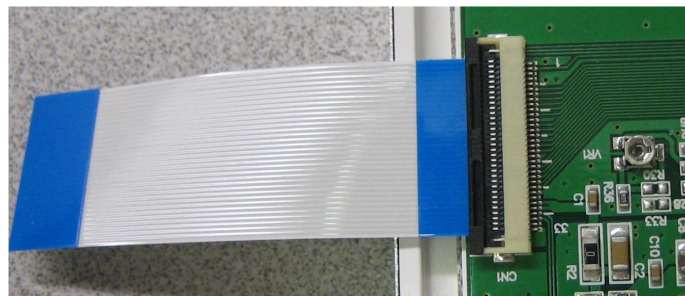


Make sure the non-conductive side is facing away from the display.

2. Turn the display over and connect the other end into J3 on the CBC-2 PCB. Connect the touch panel cable into J14 on the CBC-2.

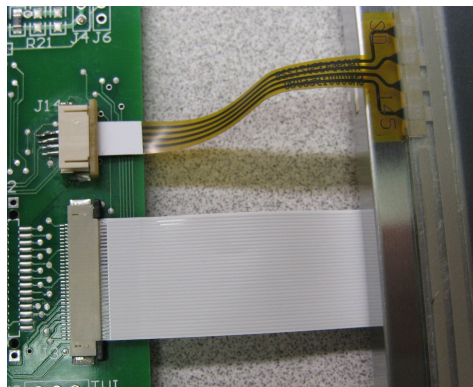

HANTRONIX

3. Connect the backlight connector into the backlight connector on the back of CBC-2 PCB.
4. Place a spacer 0904-0375 over each of the Screws 0900-0004-58.
5. Thread the screw assembly through one of the holes on CBC-2 PCB and tighten it down. Repeat this for the other three mounting holes.

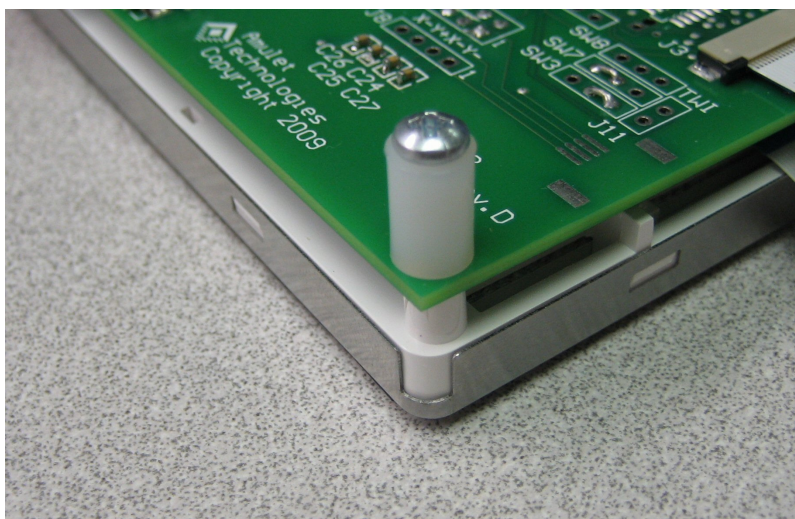

6. Plug in the 5V power adapter .
7. Confirm the display and touch panel work correctly.
8. If the display does not work check the display connection.

Questions? Email or call Amulet at 1-888-374-8688

