

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol Pcd](#)
[SJE020067](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

REV	ECN	APP'D
-	6519	JT #15/10

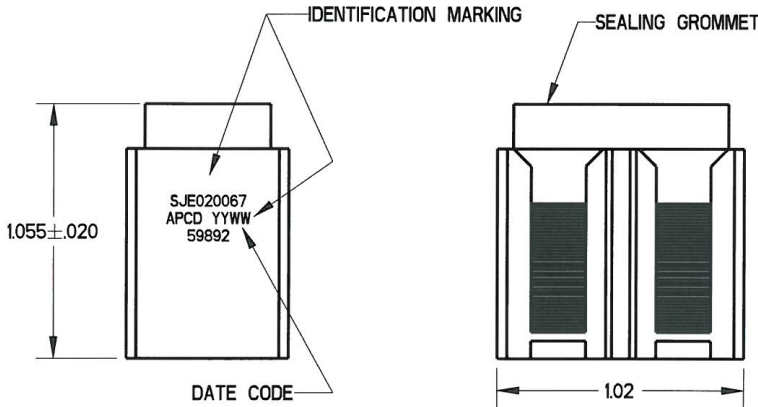

- NOTES:
- MATERIALS:
 BODY: POLYETHERIMIDE PER ASTM-D5205.
 GROMMET: SILICONE BLEND ELASTOMER.
 RESISTOR: 56.2K Ω , RNC55H5622FS, POWER RATING: 1/8W @ 70°C, 1/10W @ 125°C. QTY: 5.
 INTERNAL PIN CONTACT:
 COPPER ALLOY, HARD GOLD PLATE PER MIL-DTL-45204.
 - PERFORMANCE SPECIFICATION PER SAE-AS8174.
 (SUBJECT TO LIMITATIONS OF THE ELECTRONIC COMPONENTS)
 TEMPERATURE: -65°C TO 200°C.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 25°C.
 DIELECTRIC WITHSTANDING VOLTAGE:
 1500 VRMS AT SEA LEVEL,
 AND 200 VRMS AT 100,000 FT. ALTITUDE.
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS.
 VIBRATION AND SHOCK: PER SAE-AS8174 PARA 3.5.8 & 9.
 - MODULE ACCEPTS SOCKET CONTACTS (10) M39029/22-192.
 - MODULE TO BE MOUNTED ON M81714/67 RAIL SYSTEM.

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE SJE SERIES ELECTRONIC MODULE (5) 56.2K Ω , RNC55H5622FS	
			ENGR M. DiGIACOMO 3/29/10			
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA	CHKD <i>Rid. Newman</i> 4/15/10	SIZE A	DWG NO. SJE020067	REV -	
		APPD <i>John</i> 4/15/10	CODE: 58982	SCALE: 1.667	SHEET 1 OF 1	