

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[Amphenol Pcd](#)
[SJG012271](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SJG012270

REV	ECN	APP'D
-	5536	

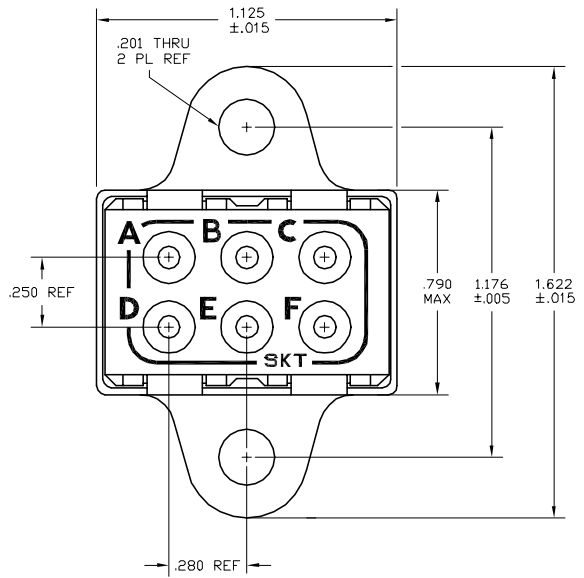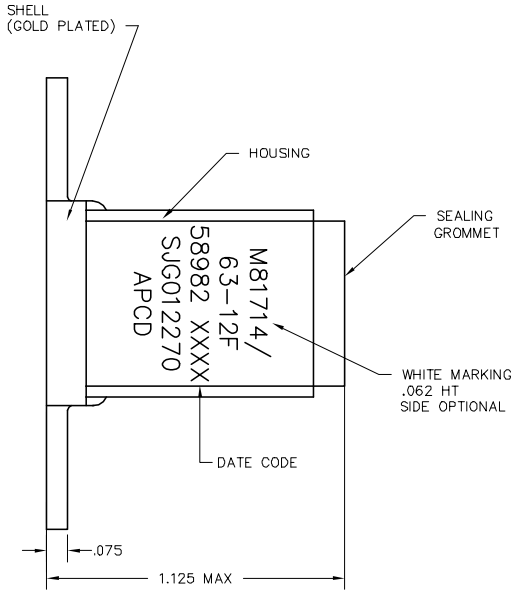

NOTES:

- MATERIALS:
 BODY: POLYETHERIMIDE PER MIL-P-46184.
 GROMMET: SILICONE BLEND ELASTOMER.
 CONTACT RETAINERS: BERYLLIUM COPPER.
 SHELL: COPPER ALLOY, GOLD PLATE PER MIL-G-45204
- PERFORMANCE SPECIFICATIONS:
 OPERATING TEMP: -65° TO 200°C
 CURRENT RATING: 23 AMPS
 VIBRATION AND SHOCK: PER MIL-T-81714, PARAGRAPH 3.5.5 AND 3.5.8.
- MODULE SUPPLIED WITH SEVEN (7) M39029/22-605 SOCKET CONTACTS AND TWO (2) MS27488-12 SEALING PLUGS.

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.015 ANGLES ±2°	PROJECTION 	Amphenol Pcd		TITLE	
			SPECIFICATION DRAWING		SOCKET GROUND MODULE SIZE 12 - FLANGE MOUNT M81714/63-12F	
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC, PEABODY, MA	ENGR R. SWAINE 10/15/04	CHKD	SIZE	DWG NO.	REV
			APPD	B	SJG012270	-
			CODE: 58982	SCALE: 3X	SHEET 1 OF 1	

SJG012270

SJG012270