


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	TLY-28	IEC320 C5	1	white overmold
2	TLY-13	NEMA 5-15P	1	white overmold
3	30-00245	Wire, 3C, 18 AWG, UL SVT, 300V, 105C, 6.3 mm, VW-1, PVC, white	1	white

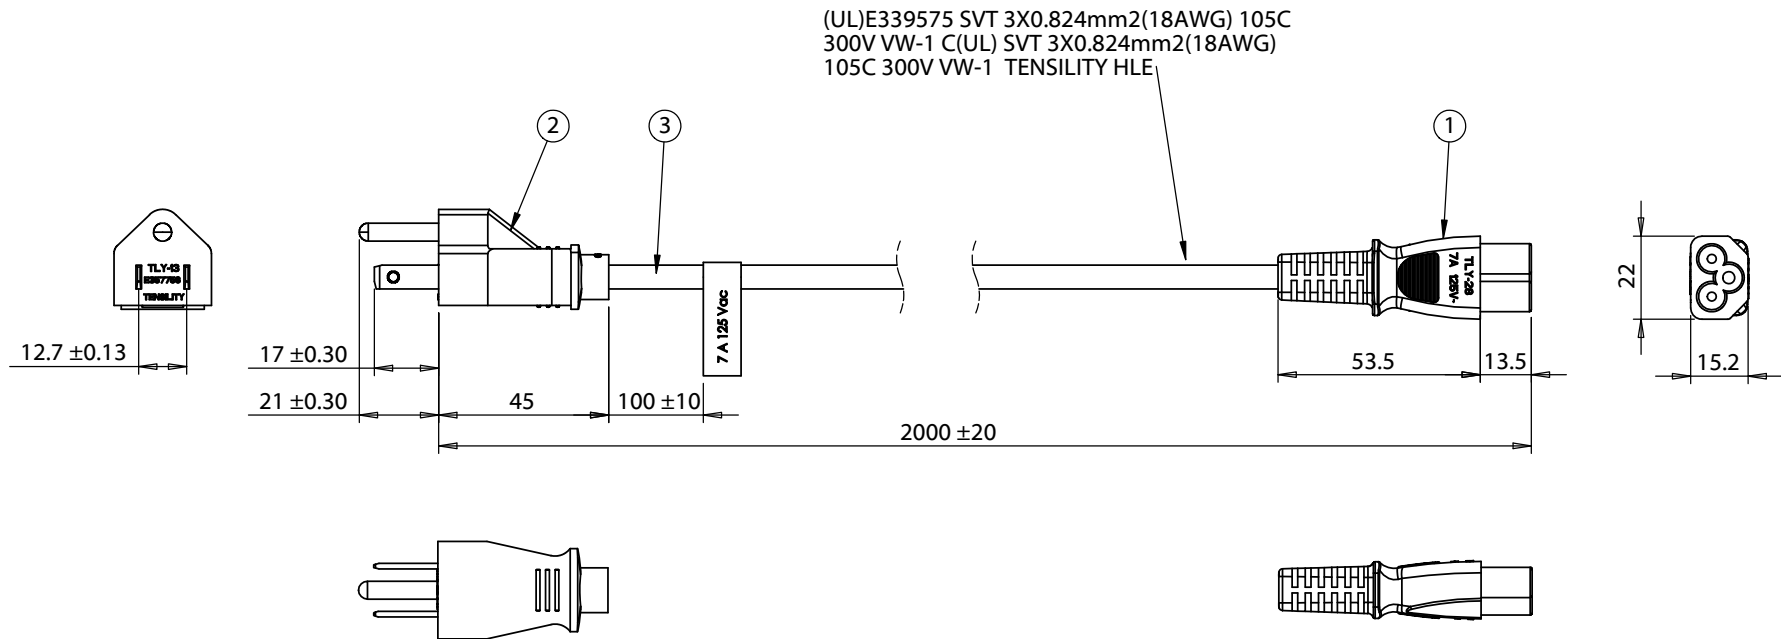

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	12/20/2013	Initial release	VERIFIED:	Rated for 7 A at 125 Vac RoHS, REACH and Dodd-Frank conflict materials compliant			
			DIMENSIONS ARE IN MILLIMETERS	Function test: no open, no reversed polarity, no short circuit, no INT	SIZE	PART NUMBER	
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Ac cord, 2000 mm, U.S. NEMA 5-15P plug, TLY-13 to C5, TLY-28, 18 AWG, SVT wire, 30-00245, white	A	11-00058	
					SCALE: 1:2	WEIGHT:	SHEET 1 OF 1