

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)

[PL95-5](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

**RED INDICATES ORIGINAL**

4

2

1

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVOLUTIONS			1-0370		SH 1
REV	ECO NO.	DESCRIPTION	DWN	APPROVED	DATE
V	12286	PICATORIALLY REORIENTED DIELECTRICS ON SH.27 SEE ECO	JCM	<i>MM</i>	<i>3/88</i>

DASH NO.	FIG. NO.	CABLES ACCOMMODATED	A DIM	B DIM	C FLATS	D FLATS	ASSEMBLE PER
-1		RG-58					
-2		ESSEX 621-715					
-2A		BELDEN 8279					
-2B		AT&T 730A					
-3	1,3	RG-223	.096	1.274	.438	.500	TAI-101
-3A		RG-55					
-4		RG-122					
-5		BELDEN 8218					
-5A		RG-174					
-5A		RG-187					
-5A		RG-196					
-5B		HEWLETT-PACKARD 8120-1107					
-6		BELDEN 9231					
-6A	1	RG-8	.130	1.336	.625	.688	TAI-120
-6B		RG-11					
-6B		RG-9					
-6E		RG-13					
-6E		RG-5					
-6E		RG-6					
-21		RG-303					
-22		RG-180					
-31		GRUMMAN GC87SGP1					
-31		RG-187 DBL SHLD					
-34		BELDEN 8228					
-36	1,3	MICRODOT 275-3991	.096	1.274	.438	.500	TAI-101
-36		AMPEX 616-569					
-37		RAYCHEM 810					
-41		RG-304					
-44		BELDEN 9248					
-44		BRAND-REX B749					
-44		GORE CO6C032					
-48	1	BELDEN 9880	.130	1.336	.625	.688	TAI-120
-50		BELDEN 89880					
-086	2	RG-405			.250		TAI-130
-141		RG-402			.313		TAI-130

INCH		MM	
.005	0.13		
.030	0.76		
.094	2.39		
.096	2.44		
.125	3.18		
.130	3.30		
.250	6.35		
.313	7.95		
.438	11.13		
.500	12.70		
.625	15.88		
.688	17.48		
.828	21.03		
1.274	32.36		
1.336	33.93		
1.846	46.89		

FIG 1  
-1 SHOWN



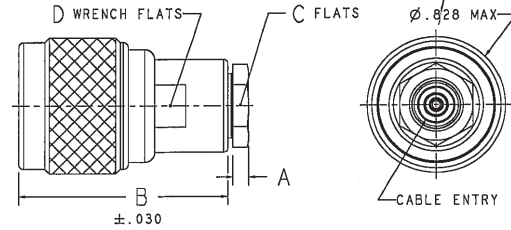


FIG 2  
-141 SHOWN

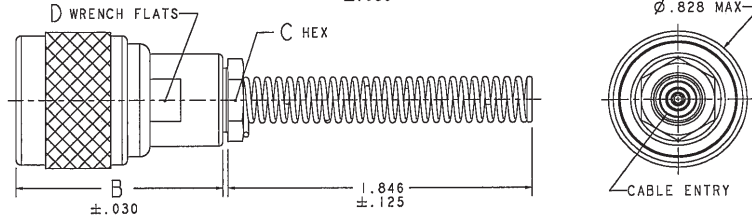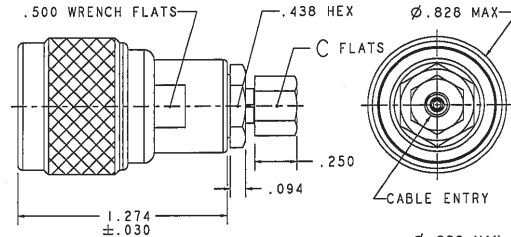

⚠ IF BEND RELIEF SPRING REQUIRED, (SEE FIG 3) ADD SUFFIX "BR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -6, -6A, -6B, -6E, -48, -50, -086, -141)

- 4. TYPE 'N' COAXIAL CABLE PLUG, 50 & 75 OHM VERSIONS
- 3. EXAMPLE OF COMPLETE MODEL NO.:

PL95 = 50 OHM  
 PL95S = 50 OHM W/SAFETY WIRE HOLES  
 UPL95 = 75 OHM  
 UPL95S = 75 OHM W/SAFETY WIRE HOLES

UPL95-2 BR

BEND RELIEF SPRING (OPTIONAL ⚠)  
 CABLE GROUP NUMBER

- 2. FINISH: TFS-1A (NICKEL)
- 1. ALL DIM ARE IN INCHES

FIG 3  
-1 SHOWN

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED	<b>TROMPETER</b> RF connectivity	PL95/UPL95/ PL95S/UPL95S	
DWG JCM 2-24-98	MATERIAL	CODE IDENT 14949	DRAWING NO. 1-0370
105-1015 CHK WM 3-2-98			REV V
105-0687 ENGR			
NEXT ASSY APPR	SCALE 5/2	DATE 11-25-74	SHEET 1C

4

3

2

1